

PV Cell and Module Calibration Activities at NREL

K. Emery, A. Anderberg, J. Kiehl, C. Mack,
T. Moriarty, L. Ottoson, and S. Rummel

*Presented at the 2005 DOE Solar Energy Technologies
Program Review Meeting
November 7–10, 2005
Denver, Colorado*

Conference Paper
NREL/CP-520-38936
November 2005

NREL is operated by Midwest Research Institute • Battelle Contract No. DE-AC36-99-GO10337



NOTICE

The submitted manuscript has been offered by an employee of the Midwest Research Institute (MRI), a contractor of the US Government under Contract No. DE-AC36-99GO10337. Accordingly, the US Government and MRI retain a nonexclusive royalty-free license to publish or reproduce the published form of this contribution, or allow others to do so, for US Government purposes.

This report was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or any agency thereof.

Available electronically at <http://www.osti.gov/bridge>

Available for a processing fee to U.S. Department of Energy and its contractors, in paper, from:

U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831-0062
phone: 865.576.8401
fax: 865.576.5728
email: <mailto:reports@adonis.osti.gov>

Available for sale to the public, in paper, from:

U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
phone: 800.553.6847
fax: 703.605.6900
email: orders@ntis.fedworld.gov
online ordering: <http://www.ntis.gov/ordering.htm>



PV Cell and Module Calibration Activities at NREL

K. Emery, A. Anderberg, J. Kiehl, C. Mack, T. Moriarty, L. Ottoson, and S. Rummel
National Renewable Energy Laboratory, Golden, Colorado, keith_emery@nrel.gov

ABSTRACT

The performance of PV cells and modules with respect to standard reference conditions is a key indicator of progress of a given technology. This task provides the U.S. terrestrial PV community with the most accurate measurements that are technically possible in a timely fashion. The international module certification and accreditation program PVGap requires certification laboratories to maintain their calibration traceability path to groups like this one. The politics of a “world record” efficiency requires that an independent laboratory perform these measurements for credibility. Most manufacturers base their module peak watt rating upon standards and reference cells calibrated under this task. This task has been involved in reconciling disputes between manufacturers and their cell suppliers in terms of expected versus actual performance. This task has also served as a resource to the PV community for consultation on solar simulation, current versus voltage measurement instrumentation, measurement procedures and measurement artifacts.

1. Objectives

The key indicator of PV performance is the peak watt rating. For meaningful comparisons among technologies the peak watt is defined as the maximum electrical power produced under a set of standard reference conditions defined by a reference total and spectral irradiance and reference temperature.¹ The most accurate procedures involve an accurately calibrated photovoltaic reference cell to set or measure the light level with a spectral correction factor.¹⁻³ For measurements under natural sunlight the reference device is a photovoltaic cell or a thermal detector such as a cavity radiometer or pyranometer and the spectral correction factor is computed after the measurement. For multijunction devices the challenge is to be able to ensure that each junction is operating at the correct photocurrent.

This lab is one of four laboratories in the world that are certified for calibrating World Photovoltaic Reference Cells (WPVS). The world-wide terrestrial PV community calibration traceability path for efficiency and the peak watt rating is to these cells or other primary reference cells calibrated at NREL or at one of the other three labs. The other three WPVS labs are the primary calibration facility for their countries: AIST in Japan, PTB in Germany, and TIPS in China. The TIPS laboratory has not participated in international calibration activities in recent years.

For an internationally recognized calibration traceability path, NREL’s primary reference cell,

secondary reference cell, and secondary module calibrations must be accredited to ISO 17025 standards. This process was started several years ago with certification by the American Association for Laboratory Accreditation (A2LA) for secondary reference cell calibration using primary reference cells calibrated at NREL. In July 2005, the scope of the accreditation was expanded to include calibration certificates for primary reference cell calibration and secondary module calibration. The procedures are in compliance with U.S., ASTM, and International Electrotechnical Commission standards. This calibration service is critical to module certification and qualification laboratories and to any manufacturer with a quality system that requires traceable calibrations. Certification also assures customers that do not need an ISO17025 accredited calibration that the laboratory follows a formal quality assurance program.

Certification requires a formal quality system that describes the organization, quality system, document control, purchases, complaints, nonconforming calibration work, preventative actions, corrective actions, record control, audits, and review. The technical requirements include work instructions, checklists, forms, diagrams, proof of traceability to a national calibration lab (National Institute of Standards and Technology), and an uncertainty analysis of all measurements producing a numerical result. To prevent a calibration lab from deluding itself that its results are more accurate than claimed, periodic intercomparisons or proficiency testing are required. For our lab, this involves comparing our primary and secondary reference cell calibrations with those of labs of comparable uncertainty around the world.

2. Technical Approach

The equipment used by this group has been described elsewhere.^{4,5} A spectrally adjustable simulator is required to accurately determine the I-V characteristics of multi-junction cells or modules with respect to a reference spectrum. This has been implemented for 1-sun cells. For modules, the spectral error is computed for each junction with the efficiency based upon the current limiting junction. For concentrator cells, the lamp voltage is adjusted to minimize the spectral error and the efficiency is based upon the 1-sun current. Linearity is not assumed because a linear reference cell is used in the concentrator simulator.⁶

The scope of ISO 17025 accredited calibrations is limited. Primary reference cells must be packaged following the WPVS design or part of the WPVS sample set and be submitted by national PV calibration facilities. Secondary reference cells must

be packaged with wires and a temperature sensor attached with a maximum size of 20 cm by 20 cm, open-circuit voltage (V_{oc}) less than 40 V, and short-circuit current (I_{sc}) between 1 mA and 15A. Photovoltaic modules must be less than 150 by 120 cm in size, have a V_{oc} between 0.4 V and 290 V, and I_{sc} between 0.1 A and 50 A. A cell with a relative spectral responsivity representative of the module must be supplied with the module. This can be a bare cell, a packaged cell, or a single cell in the module with external wires. All ISO 17025 calibrations require a cover letter with the sample requesting the measurement and providing details about the sample and contact information.

3. Results and Accomplishments

During FY05 the group performed 2173 calibrations on 754 cells and 2481 calibrations on 466 modules. The group also performed 1127 spectral responsivity measurements on 589 cells and modules. The outdoor concentrator IV test bed measured 50,140 IV curves with a direct beam irradiance above 200 Wm^{-2} on 8 concentrator modules.

During FY05 the group expanded its ISO 17025 accreditation from secondary reference cells to include primary reference cells and modules (Fig. 1).

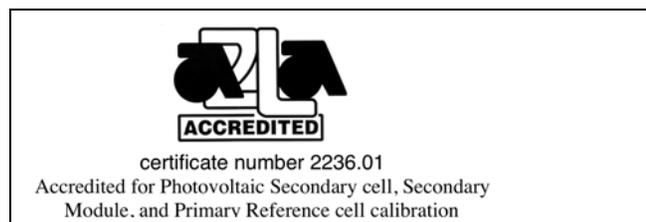


Fig. 1. Proof of accreditation to ISO 17025 standards by the American Association of Laboratory Accreditation.⁷

4. Conclusions

The NREL Cell and Module Performance Characterization Group provides the PV community with state-of-the-art measurements of the spectral responsivity and I-V measurements with respect to standard reporting conditions. The group offers ISO 17025 accredited calibration certificates for cells and modules that fall within the scope.

ACKNOWLEDGEMENTS

This work was performed under DOE contract DE-AC36-99-GO10337.

REFERENCES

- ¹K.A. Emery and C.R. Osterwald, *Solar Cells* 17, 253 (1986).
- ²K.A. Emery, et. al, *Proc. 18th IEEE Photovoltaic Spec. Conf.* 623, (1985).
- ³K.A. Emery, "Measurement and Characterization of Solar cells and Modules," *Handbook of Photovoltaic Science and Engineering*, Chap. 16, pp. 701-747, A.

Luque and S. Hegedus editors, John Wiley & Sons, W. Sussex, U.K., ISBN 0-471-49196-9, 2003.

⁴S. Rummel, et. al, *Proc. 15th NCPV Program Review Meeting*, September 8-11, 1998, AIP proceedings **CP-462**, 553 (1998).

⁵ <http://www.nrel.gov/measurements/device.html>

⁶J. Kiehl, K. Emery, and A. Andreas, *Proc. 19th EU PVSEC*, Paris France, June 7-11 2004.

⁷ <http://www.a2la2.net/>

MAJOR FY 2005 PUBLICATIONS

Proc. DOE Solar Program Review Meeting, October 25-28, 2004

W.E. McMahon, K.A. Emery, et. al, "An On-Sun Comparison of $GaInP_2/GaAs$ Tandem Cells with Top Cell Thickness Varied"

J. Kiehl and K. Emery, "Characterization of Photovoltaic Concentrators"

Proc. 31st IEEE PVSC, , Jan. 3-7, 2005

K. Emery, et al, "Trust But Verify: Procedures to Achieve Accurate Efficiency Measurements for All Photovoltaic Technologies"

S. Bailey, K. Emery et. al, "Standards for Space Solar Cells and Arrays"

W.E. McMahon, K.A. Emery, et. al, "An on-sun comparison of $GaInP_2/GaAs$ tandem cells with top cell thickness varied"

S. Winter, K. Emery, et. al, "The Results of the Second World Photovoltaic Scale Recalibration"

J.A. del Cueto, S. R. Rummel, "Comparison of Diode Quality plus other factors in Polycrystalline cells and Modules from Outdoor and Indoor Measurements"

K. Araki, K. Emery, et. al, "Comparison of Efficiency Measurements for a HCPV Module with 3J Cells in 3 Sites"

M. W. Wanlass, T. Moriarty, et. al, " Lattice-Mismatched approaches for High Performance, III-V Photovoltaic energy Converters "

Proc. International Conference on Solar Concentrators for the Generation of Electricity or Hydrogen, Scottsdale, Arizona, May 1-5, 2005.

M.W. Wanlass, K. Emery, et. al, "GaInP/GaAs/GaInAs Monolithic Tandem Cells for High-Performance Solar Concentrators"

W.E. McMahon, K.A. Emery, et. al, "Outdoor Testing of $GaInP_2/GaAs$ Tandem Cells with Top Cell Thickness Varied"

M.A. Green, K. Emery, et. al "Solar Cell Efficiency Tables (version 25)" PIP **13**, 49, 2005.

M.A. Green, K. Emery, et. al "Solar Cell Efficiency Tables (version 26)" PIP, **13**, 387, 2005.

A. van der Heide, T. Moriarty, et. al, " Comparison between large reference cells calibrated by ESTI-JRC, NREL and PTB, performed at ECN", *proc. 20th EU PV solar Energy Conf. Barcelona, Spain, June 1, 2005.*

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.

1. REPORT DATE (DD-MM-YYYY) November 2005		2. REPORT TYPE Conference Paper		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE PV Cell and Module Calibration Activities at NREL			5a. CONTRACT NUMBER DE-AC36-99-GO10337		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) K. Emery, A. Anderberg, J. Kiehl, C. Mack, T. Moriarty, L. Ottoson, and S. Rummel			5d. PROJECT NUMBER NREL/CP-520-38936		
			5e. TASK NUMBER PVA6.3401		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Renewable Energy Laboratory 1617 Cole Blvd. Golden, CO 80401-3393				8. PERFORMING ORGANIZATION REPORT NUMBER NREL/CP-520-38936	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) NREL	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER	
12. DISTRIBUTION AVAILABILITY STATEMENT National Technical Information Service U.S. Department of Commerce 5285 Port Royal Road Springfield, VA 22161					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT (Maximum 200 Words) The performance of PV cells and modules with respect to standard reference conditions is a key indicator of progress of a given technology. This task provides the U.S. terrestrial PV community with the most accurate measurements that are technically possible in a timely fashion. The international module certification and accreditation program PVGap requires certification laboratories to maintain their calibration traceability path to groups like this one. The politics of a "world record" efficiency requires that an independent laboratory perform these measurements for credibility. Most manufacturers base their module peak watt rating upon standards and reference cells calibrated under this task. This task has been involved in reconciling disputes between manufacturers and their cell suppliers in terms of expected versus actual performance. This task has also served as a resource to the PV community for consultation on solar simulation, current versus voltage measurement instrumentation, measurement procedures and measurement artifacts.					
15. SUBJECT TERMS Photovoltaics; solar; module calibration; PV; NREL					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code)