

Multijunction Photovoltaic Technologies for High Performance Concentrators

Robert D. McConnell & Martha Symko-Davies

High Performance Photovoltaic Project
National Center for Photovoltaics
National Renewable Energy Laboratory

NREL/PR-520-39866

Presented at the 2006 IEEE 4th World Conference on Photovoltaic Energy Conversion (WCPEC-4) held
May 7-12, 2006 in Waikoloa, Hawaii.



Disclaimer and Government License

This work has been authored by Midwest Research Institute (MRI) under Contract No. DE-AC36-99GO10337 with the U.S. Department of Energy (the “DOE”). The United States Government (the “Government”) retains and the publisher, by accepting the work for publication, acknowledges that the Government retains a non-exclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for Government purposes.

Neither MRI, the DOE, the Government, nor any other agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe any privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not constitute or imply its endorsement, recommendation, or favoring by the Government or any agency thereof. The views and opinions of the authors and/or presenters expressed herein do not necessarily state or reflect those of MRI, the DOE, the Government, or any agency thereof.

Mobilizing the nation's resources
to develop reliable and affordable
solar energy technologies


Solar Energy Technologies Program


Multi-Year Program Plan
2007–2011




U.S. Department of Energy
**Energy Efficiency
and Renewable Energy**
Imagining you a prosperous future where energy
is clean, abundant, reliable, and affordable

- Systems Driven Approach
- Technical Improvement Opportunities (TIOs)
- Stage Gates
- Solar Advisor Model (SAM)

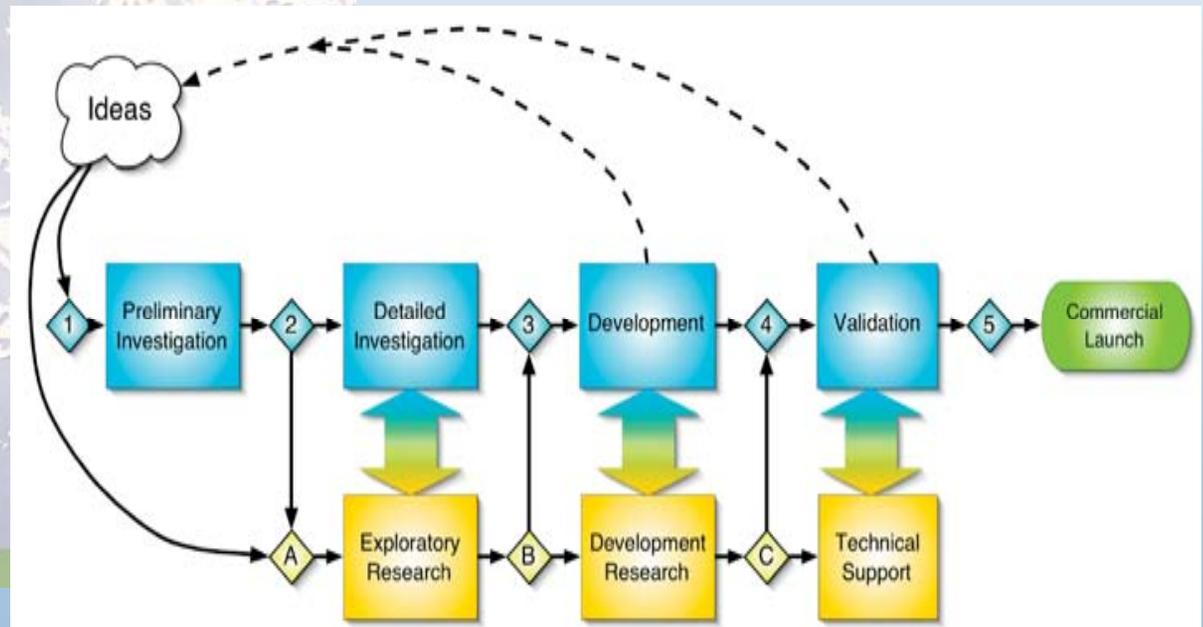

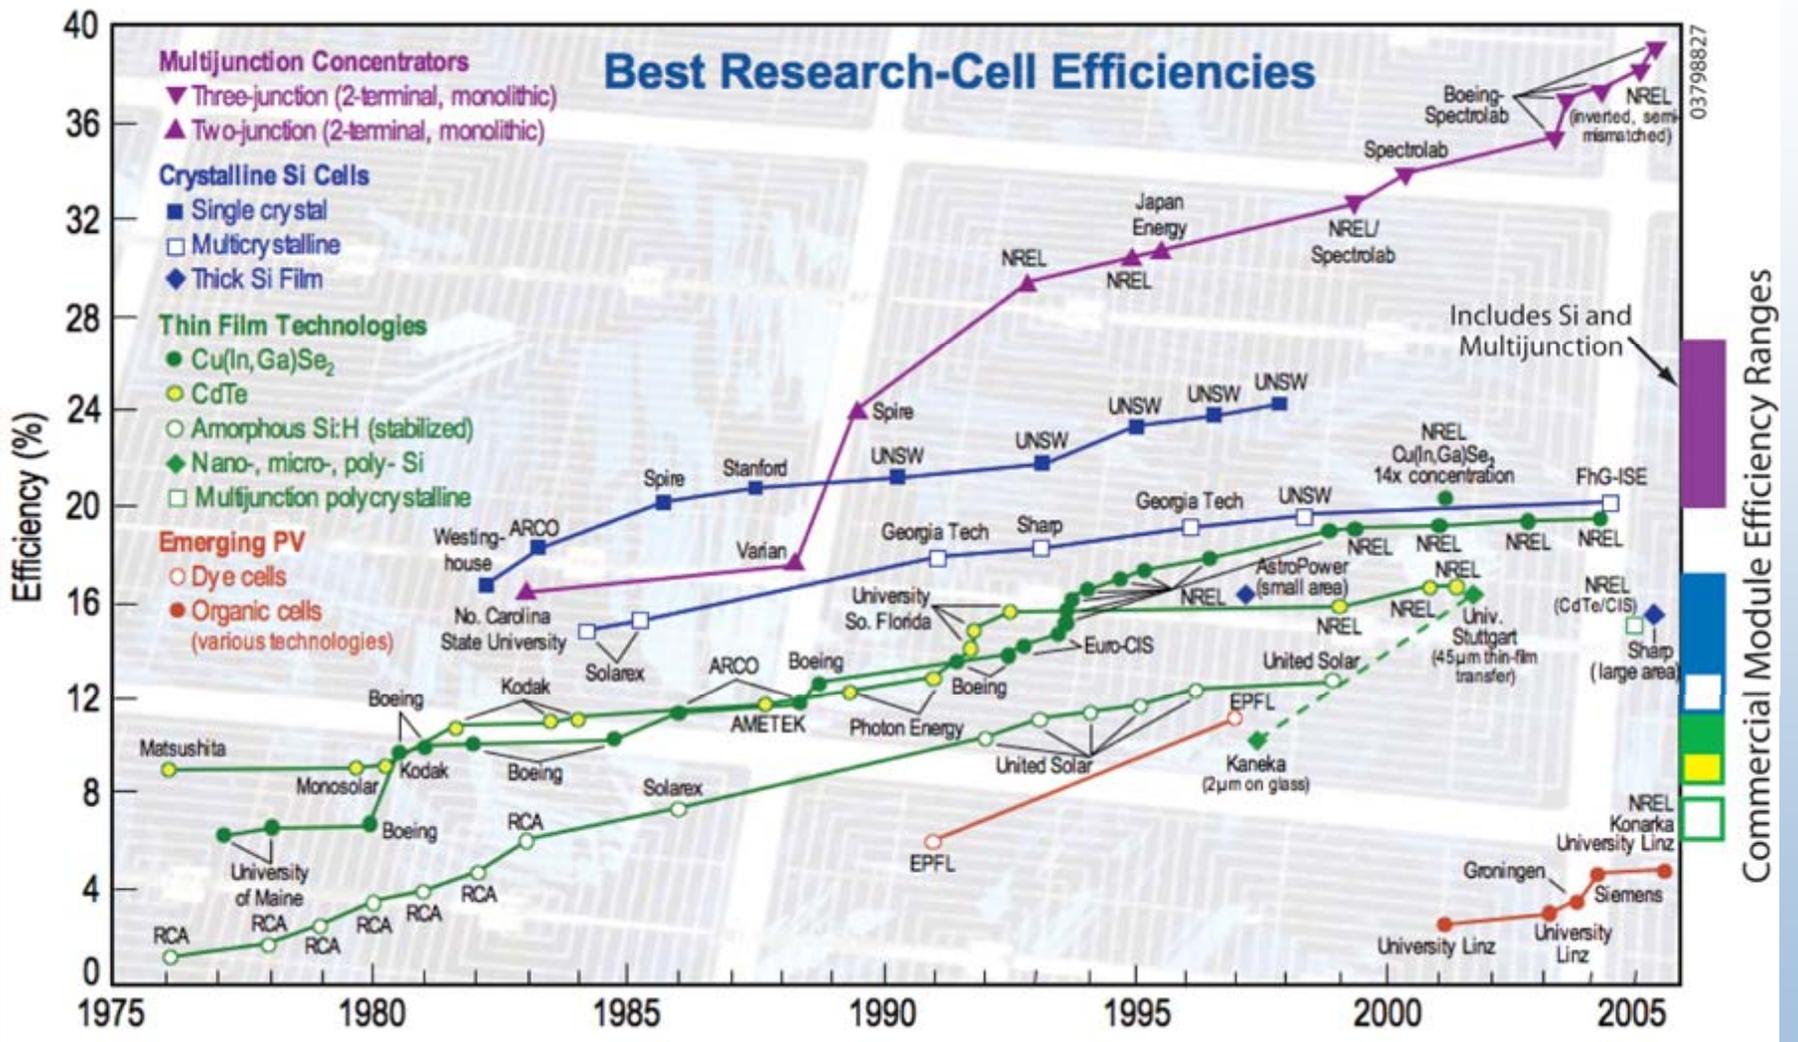

High Performance Concentrator PV Project

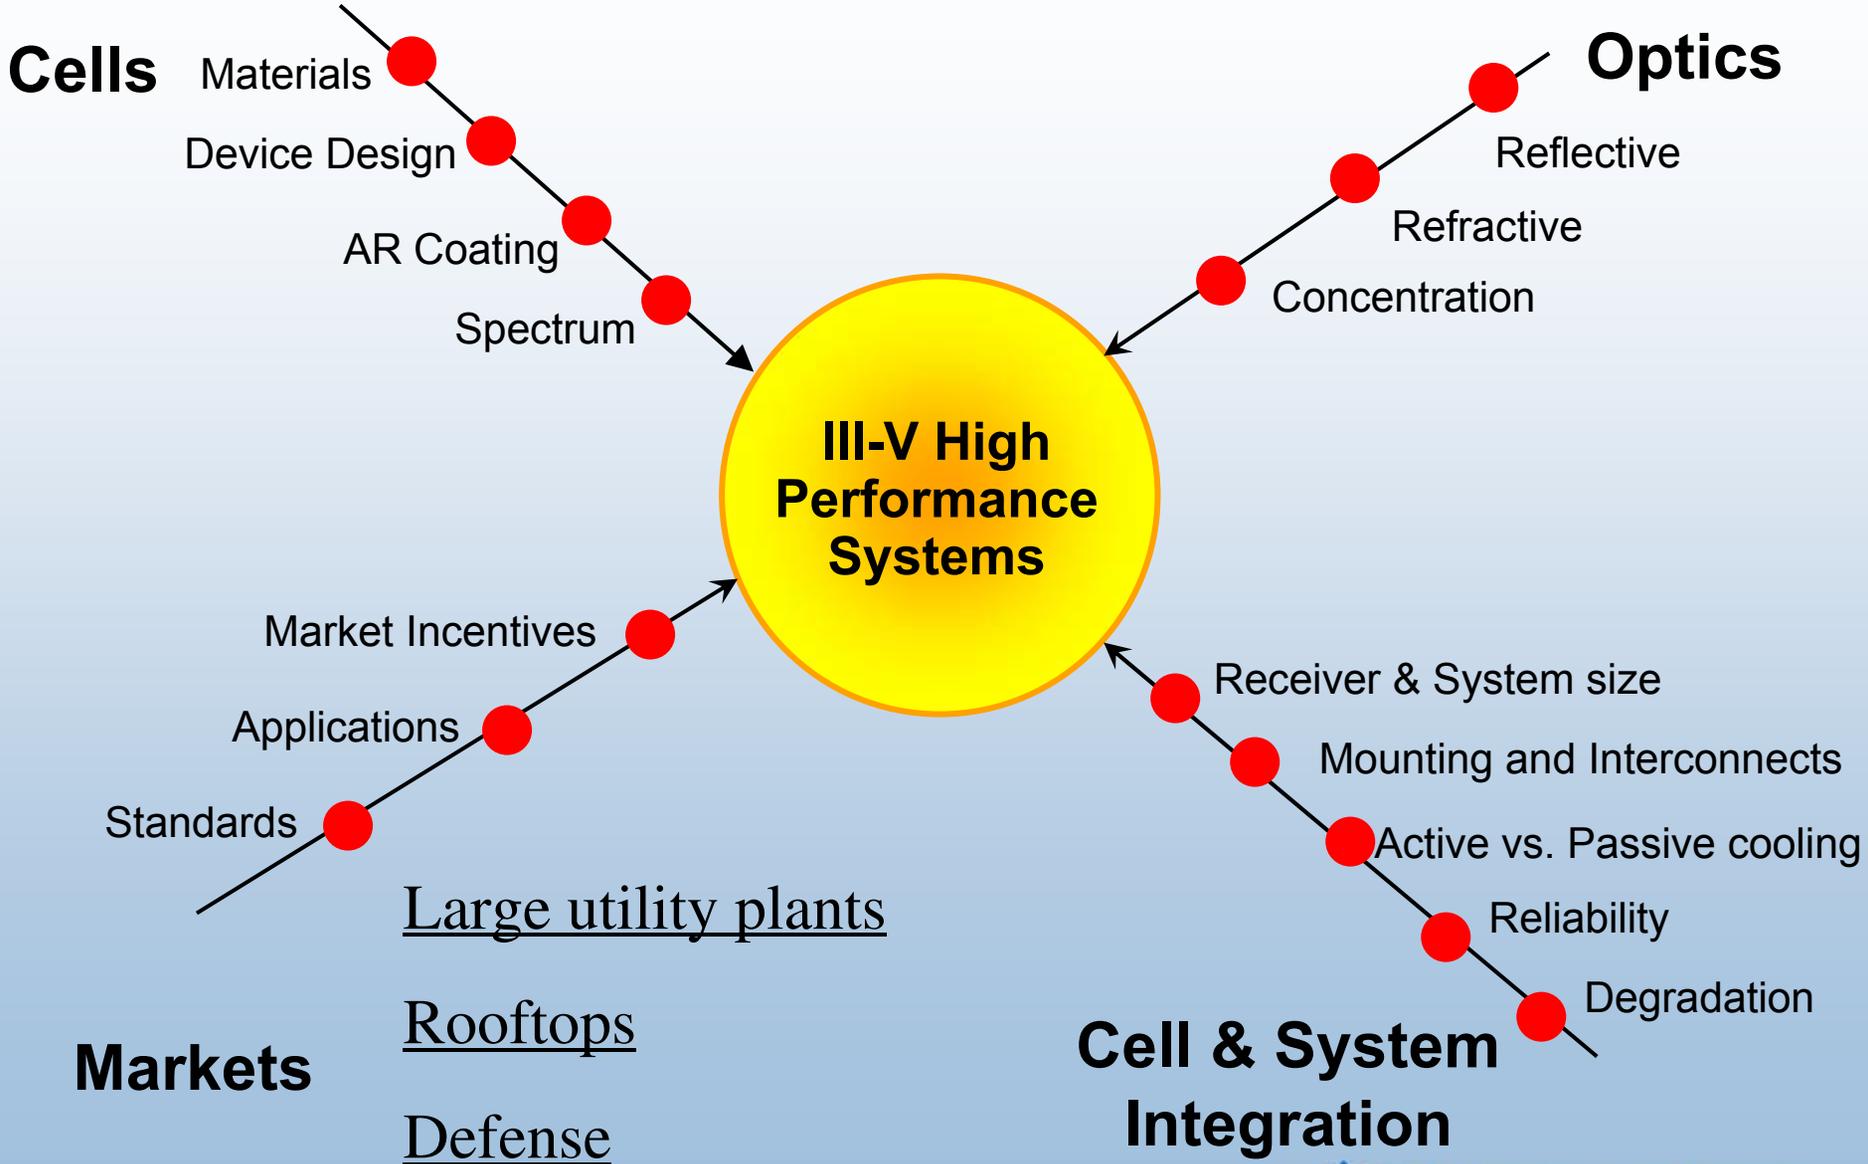

Efficiency Impact on Levelized Cost of Energy (LCOE)

System Size	MW	10	12.5	16
Module Price	\$/W _{dc}	4.13	3	1.56
Cell Efficiency	%	26 (Si)	32 (III-V)	40 (III-V)
Module Size	kW _{pdc}	40	50	64
Module Efficiency	%	20	25	32
Installed System Price	\$/W _{dc}	5.95	4.3	2.52
Levelized Cost of Energy (LCOE)	\$/kWh _{ac}	0.15-0.27	0.10-0.15	0.06-0.11

Reference: DOE MYPP 2007-2011: from Table 3.1.6-5

High Performance Concentrator PV Subcontracts (2004–2007)


Subcontractor	Concentrator Cells Project Title	3-Year Funding Total
Spectrolab, Inc.	Ultra-High-Efficiency Multijunction Cell and Receiver Modules	\$837,000 plus \$126,000 cost share
California Institute of Technology	Four Junction Solar Cell with 40% Target Efficiency Fabricated by Wafer Bonding and Layer Transfer	\$525,000
University of Delaware	Novel High Efficiency Photovoltaic Devices Based on the III-N Material System	\$450,000
Ohio State University	Optimized III-V Multijunction Solar Cells on Patterned and Ge Substrates	\$465,000
University of Delaware	Theoretical and Experimental Investigation of Approaches to >50% Efficient Solar Cells	\$300,000

High Performance Concentrator PV Contracts (2004–2007) *cont.*

Subcontractor	Concentrator Systems Project Title	3-Year Funding Total
Amonix, Inc.	Design and Demonstration of >33% Efficient High Concentration Module using >40% III-V Multijunction Devices	\$836,000 plus \$89,000 cost share
JX Crystals, Inc.	Toward 40% Efficient Hybrid Multijunction III-V Terrestrial Concentrator Cells	\$450,000
Concentrating Technologies, LLC	A Scaleable Reflective Optics High Concentration PV System	\$450,000 plus \$470,000 cost share
SunPower Corporation/JX Crystals	Low Concentration PV System Prototype Assessment of a 3x Mirror Module with SunPower's 20% Efficient A-300 Solar Cell	\$65,000
Arizona State University	Development of IEC Design Qualification Standard for Concentrator PV Modules	\$100,000

Ultra-High-Efficiency Solar Cell and Receiver Module

PI: Richard R. King & Raed A. Sherif, Spectrolab, Inc.
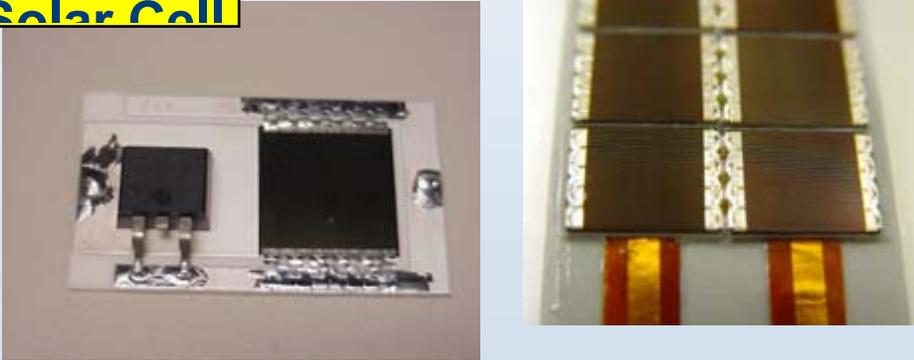
<ul style="list-style-type: none">• Research Objectives: This program aims to develop ultra-high-efficiency triple-junction solar cells and to demonstrate a working robust receiver packages.	<ul style="list-style-type: none">• Significant Results:<ul style="list-style-type: none">• 39.0% (lattice matched) and 38.8% (lattice mismatched) concentrator cells• One year of receiver tests @ 220 suns with no change in performance.
<ul style="list-style-type: none">• Approach:<ol style="list-style-type: none">1. High-efficiency GaInP/GaInAs/Ge triple-junction concentrator solar cells2. Metamorphic, lattice-matched, and mechanically stacked solar cells3. Analytical modeling and long-term experimental evaluation of different receiver designs	<ul style="list-style-type: none">• Graphic:<p>assembly developed for distributed point such as Fresnel lens parquet primary optics.</p><p>assembly for dense array mirror systems using parabolic dish optics.</p>
<ul style="list-style-type: none">• Broader Impact:<ul style="list-style-type: none">• Pushing III-V multijunction cells to ever higher efficiency lowers balance-of-module and balance-of-system costs, making concentrator PV one of the most cost-effective renewable electricity sources.• Long-term receiver reliability studies lead to widespread implementation of and confidence in concentrating PV.	<p>Ultra-High-Efficiency Solar Cell</p>  <p>(a) (b)</p>

Title: Four-Junction Solar Cell with 40% Target Efficiency Fabricated by Wafer Bonding and Layer Transfer



PI: Harry Atwater, California Institute of Technology

• Research Objective:

Demonstrate a 40%-efficient, 1-cm² solar cell optimized for terrestrial application using a nonlattice-matched tandem heterojunction fabricated by wafer bonding and layer transfer fabrication.

• Approach:

1. Wafer-scale synthesis of InP/Si, Ge/Si and GaAs/Si transferred epitaxial template films by layer transfer fabrication.
2. Grow high-quality epitaxial compound semiconductor 2-junction subcells and double-heterostructures in (InGaP/GaAs/Ge/Si and InGaAsP/InGaAs/InP/Si) on transferred epitaxial template layers.


• Industry Impact:

Active ongoing research projects with Spectrolab is a significant component of this program; Spectrolab is fabricating MOCVD double-heterostructures and pn junction solar cells on the epitaxial templates from Caltech.

• Significant Results:

- Wafer-scale layer transfer of Ge/Si and InP/Si templates achieved at the 50-mm wafer diameter
- Less than 1 nm roughness and less than 0.1 ohm-cm² interface resistance for Ge/Si and InP/Si
- Fabricated active GaInP and GaAs double heterostructures with about 10⁷/cm² defects on Ge/Si templates

• Graphics:

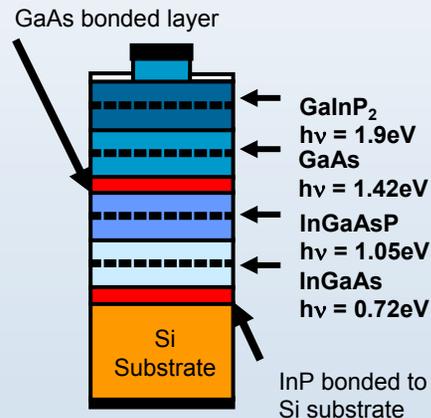

Above: Schematic of 4-junction solar cell with bonded layers.
Above right: Bonded InP/Si film on 50 mm wafer

Novel High-Efficiency Devices Based on the InGaN Material System


PI: Christiana Honsberg, University of Delaware

• Research Objective:

To demonstrate high-performance tandem solar cells based on the InGaN material system.

• Approach:

- High bandgap: Develop GaN and In-lean InGaN p-i-n and quantum well solar cells.
- Low bandgap: Develop understanding of In-rich InGaN materials grown on Ge.

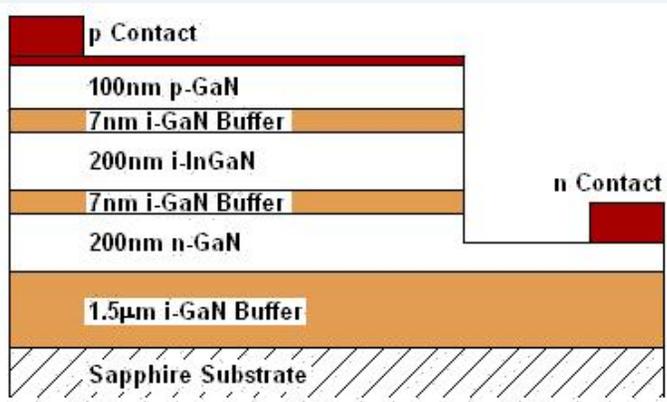


• Industry Impact:


- InGaN grown on Ge and Si could offer a continuum of bandgaps over the solar spectrum, offering path to high-efficiency, low-cost tandem solar cell in one alloy.

• Significant Results:

- GaN solar cells with external QE with >10% demonstrated when measured through metal Au contact.
- InGaN solar cells with 7% In shows 2V Voc, dominated by radiative defect channel
- Growth of InN demonstrated on Ge, with AlN or Al as a buffer

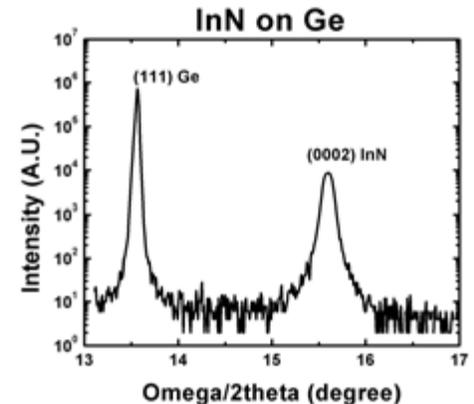

• Graphics: Emission from In-lean InGaN p-i-n solar cell

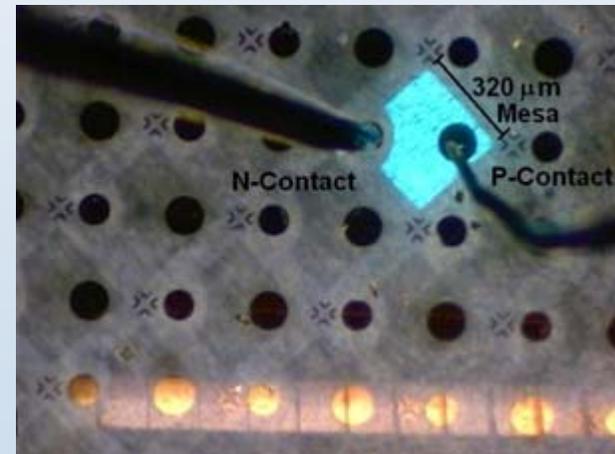

Optimized III-V Multijunction Concentrator Solar Cells on Patterned Si and Ge Substrates

PI: Steven A. Ringel, Ohio State University (MIT subcontractor)



• Research Objectives:

Develop and demonstrate the use of novel 3-D substrate engineering in Si and Ge to achieve spectrum-optimized E_g profiles leading to > 40% III-V multijunction concentrators on Si or Ge

• Approach:

1. Grow, characterize, and optimize InGaAs/Ge and InGaAs/SiGe/Si substrates that incorporate both lattice grading and patterning to achieve ideal and tunable substrate lattice constants suitable for super-efficient III-V concentrators.
2. Grow and fabricate solar spectrum-optimized InGaP/InGaAs double- and InGaP/GaAs/SiGe triple-junction concentrators on 3-D engineered Si and Ge wafers.
3. Compare lattice-matched and lattice-mismatched III-V cells on engineered substrates.


• Industrial and Broader Impact:

- Combining high-performance III-V PV concentrators with low-cost Si substrates exploits advantages of both to achieve \$/W goals
- Identical materials science has already achieved communication-band infrared and visible laser diodes on Si; combined with > 2 V cells on Si, this opens door to self-powered systems on Si chips

• Significant Results:

- First III-V dual-junction cells grown on Si with $V_{oc} > 2$ V
- First “tuned” lattice constant Si substrates for ideal III-V growth on Si. Achieved by using $Si_{0.04}Ge_{0.96}$ termination
- Optimization of the upper SiGe grade has reduced Ge/SiGe/Si substrate dislocation density reduced to record $6 \times 10^5 \text{ cm}^{-2}$
- Avoided all mismatch-related defects, such as threading dislocations and anti-phase domains

- **Graphics:** *Below:* X-TEM of InGaP /GaAs DJ cell grown and fabricated on Si using SiGe. *Right:* X-TEM of GaAs grown on perfectly lattice-tuned $Si_{0.04}Ge_{0.96}$.

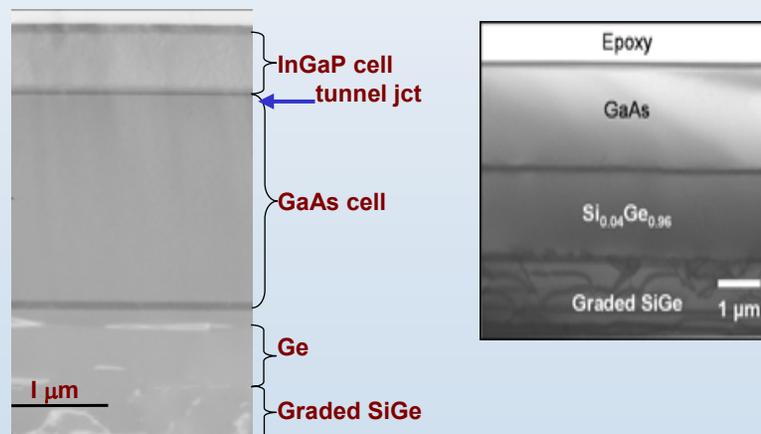

Design and Demonstration of a Greater than 33% Efficient High-Concentration Module Using >40% III-V Multi-junction Devices

PI: Kenneth Stone, Amonix Inc.



● **Research Objective:**

To design and fabricate a module that will use >40%-efficient multijunction solar cells. It is envisioned that such a module will be 33% efficient.

● **Approach:**

1. Design packing for the Ge substrate based multijunction solar cells.
2. Test packaged cells under a Fresnel lens.
3. Characterize different cells / package / lens configuration.
4. Design and construct 33%-efficient modules, to be tested on-sun, not in the laboratory.

● **Industry Impact:**

The success commercialization of systems exceeding 33% will redefine the solar energy market—extremely tough competition for any other technology in concentrators or flat-plate or in the foreseeable future of photovoltaics

Paradigm shift in installed system cost – \$3/W is imminent—leap into the utility market.

● **Significant Results:**

- Solar cell integration significantly different to silicon—CTEs, handling sensitivities, etc.
- The optics of a Fresnel lens concentrator system are very different from laboratory tests—non-uniformity, chromatic aberration, lens absorption; design of optics must be matched to multijunction response.
 - Identified top cell as the significant efficiency-limiting aspect of current design
 - Redesigned optics resulted in on-sun >28% lens-cell efficiency at operating temperature

● **Graphics:** Amonix 35 kW units before III-V cells




Toward 40% Hybrid Multi-Junction III-V Terrestrial Concentrator Cells

PI: Lewis Fraas; JX Crystals Inc.

• Research Objective:

To demonstrate 40%-efficient hybrid InGaP/GaAs-GaSb multijunction cells in a 33%-efficient Cassegrainian PV concentrator panel.

• Approach:

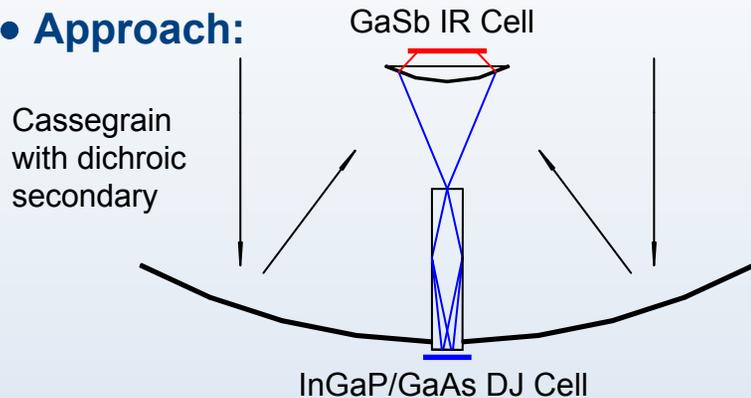


• Industry Impact:

	TODAY: 15% Silicon Planar Stationary	FUTURE: 33% Cassegrain Module
Module Cost	\$3.20 / W	\$0.75 / W
Tracker Cost	0	\$0.25 / W
Installation Cost	\$1.50 / W	\$0.75 / W
Total Cost per W	\$5.50 / W	\$2.10
KWh per kW per year	2000	2600
Cost per AkWh (A=annual)	\$2.75 per AkWh	\$0.80 per AkWh
Cents per kWh (10 year)	27.5 cents per kWh	8 cents per kWh

• Significant Results:

- Fabricated and tested all components of Cassegrain modules including IR cell and circuit, DJ cell and circuit, dichroic secondary mirror, primary mirror, IR and DJ heat sinks and 25 cm x 25 cm module enclosure.
- Measured efficiency sum of 28.7% at operating temperature

• Graphics: 3 Cassegrain modules under test

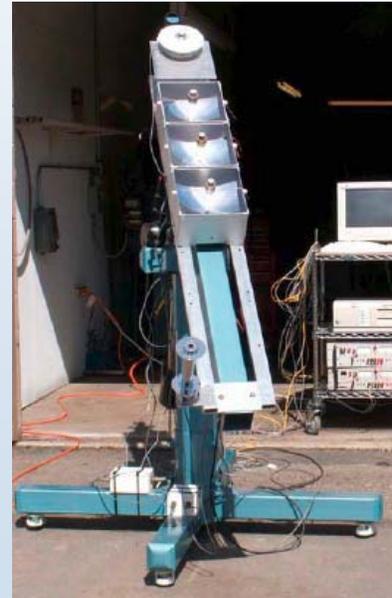


A Scaleable Reflective Optics High-Concentration PV System

PI: Stephen Kusek; Concentrating Technologies, LLC

● Research Objective:

To demonstrate a 33% reflective-optics concentrator module using passively cooled Spectrolab triple-junction cells at 500x.

● Approach:

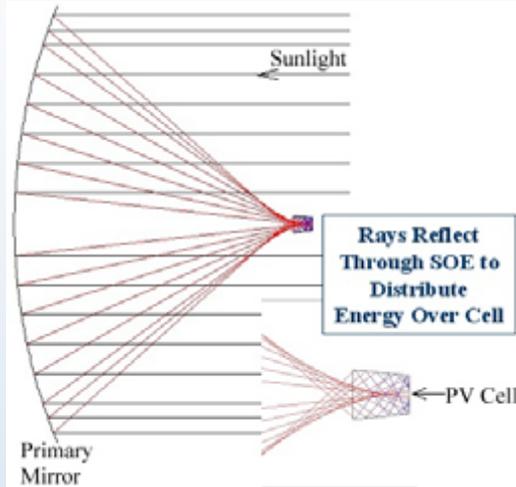

● Industry Impact:

Current single-axis tracking flat-plate silicon systems are over \$6/watt installed

Near-term low-megawatt MicroDish production can yield installed costs below \$3/watt

System architecture is versatile and allows next-generation HCPV cell as a “drop in” replacement or upgrade


● Significant Results:

- Spectrolab triple-junction powered units in continuous operation for over one year with no change in performance
- More than 14 W/cm² from the 2.25 cm² cell demonstrated
- 500x passive cooling with cell temperatures slightly above flat-plate norms

● Graphics:

Prototype 1-kW MicroDish system at the Arizona Public Service Solar Technology and Research (STAR) facility

2.25 cm² cell at about 430x - measured on-sun at 1000W/m²
2002 – 11.7 W/cm²
2004 – 13.7 W/cm²
2005 – 14.4 W/cm²

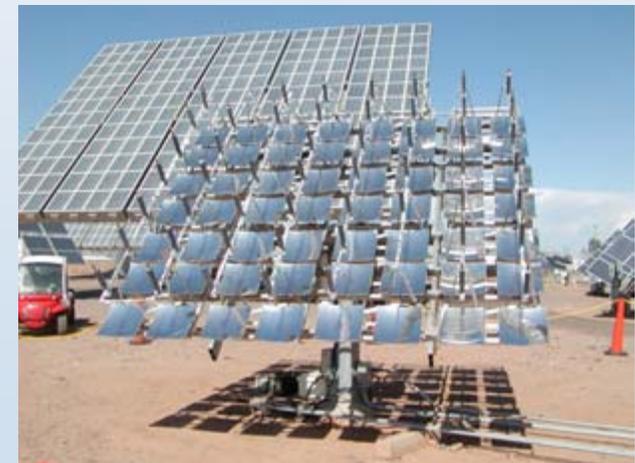

Low-Concentration Flat-Plate Module Using High-Efficiency Silicon Cells

PIs: Richard Swanson, SunPower Corp; Lewis Fraas, JX Crystals Inc.


● Research Objective:

Opportunity: The demand for solar photovoltaic cells and modules has far outstripped PV cell supply.

Solution: JX Crystals Inc. has a 3-sun mirror module design that uses 1/3 the cells to triple module production at a lower cost.

● Approach:

1. Cut standard A300 S cells into thirds.
2. Add aluminum sheet heat spreader to back of standard flat-plate laminant.
3. Add linear mirror array on front of panel.

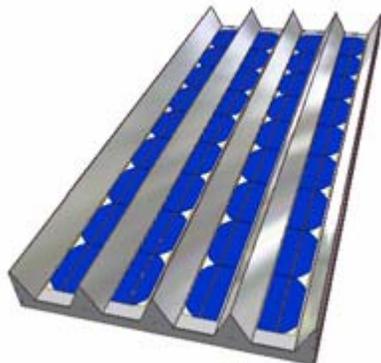

● Industry Impact:

100 kW contracted for demonstration project in Shanghai

● Significant Results:

	3-Sun # 10	3-Sun # 7	Sharp 175
Voc	44.51	45.25	39.95
Isc	5.75	5.74	6.11
FF	0.66	0.66	0.67
Vmax	33.82	34.39	30.36
Imax	4.98	4.98	5.35
Pmax, watts	168	171	163

● Graphics:

Two 3-sun JXC modules and one Sharp module on 2-axis tracker yielding results shown above.



Development of IEC Design Qualification Standard for CPV Modules

PI: Liang Ji, Underwriters Laboratories Inc.

● Research Objective:

To develop, coordinate, and publish an IEC standard for the design qualification of concentrator photovoltaic (CPV) modules

● Approach:

1. Contact CPV users and manufacturers to identify the CPV module qualification requirements.
2. Work with IEC/TC82/WG7 committee to improve draft versions.
3. Validate the new procedures agreed by WG7.
4. Submit the draft standard to IEC for official circulation, comments, and voting.

● Industry Impact:

Both performance and safety design qualification standards for the flat-plate PV modules have already been developed and extensively used by the industry. One potential approach to reduce the cost of solar electricity is the use of CPV modules. The performance design qualification standard development undertaken in this work would benefit the industry to introduce reliable CPV products in the worldwide marketplace.

Table of Contents

- 1 Scope and object
- 2 Normative references
- 3 Terms and definitions
- 4 Sampling
- 5 Marking
- 6 Testing
- 7 Pass criteria
- 8 Report
- 9 Modifications
- 10 Test procedures
 - 10.1 Visual inspection
 - 10.2 Electrical performance measurement
 - 10.3 Ground path continuity test
 - 10.4 Electrical insulation test
 - 10.5 Wet insulation test
 - 10.6 Thermal cycling test
 - 10.7 Damp heat test
 - 10.8 Humidity freeze test
 - 10.10 Water spray test
 - 10.11 Bypass diode thermal test
 - 10.12 Robustness of terminations test
 - 10.13 Mechanical load test
 - 10.14 Off-axis beam damage test
 - 10.15 Ultra-violet conditioning test
 - 10.16 Outdoor exposure test
 - 10.17 Hot-spot endurance test

Significant Results:

- Submitted IEC 62108 for international ballot

High-Efficiency Concentrators

- High-efficiency solar cell concentrator technologies are finally entering world markets
- Two companies with well-developed products, Amonix and Solar Systems, expect to install a total of 15 to 20 MW in 2006
- Many new companies are developing a variety of concentrator concepts
- Next step is incorporating ultra- high-efficiency (>37%) cells



Amonix—United States



Solar Systems—Australia

Acknowledgements

- DOE Solar Energy Technologies Program for funding and support of these projects
- NREL's Solar Energy Technologies Program (Roland Hulstrom) and National Center for Photovoltaics (Kaz) for their support of the High-Performance PV Project
- The principal investigators and their teams developing and providing their results for this presentation

Investigation of Approaches to >50% Solar Cells


PI: Christiana Honsberg, University of Delaware

• Research Objective:

Analyze advanced solar cell efficiency approaches, including realistic loss mechanisms, to determine realistic solar designs >50% efficiency.

• Approach:

- Develop band-structure models for spherical quantum dot solar cells.
- Determine design rules for material selection of quantum dot multiple-energy-level solar cells.
- Calculate impact of doping on QD energy levels.

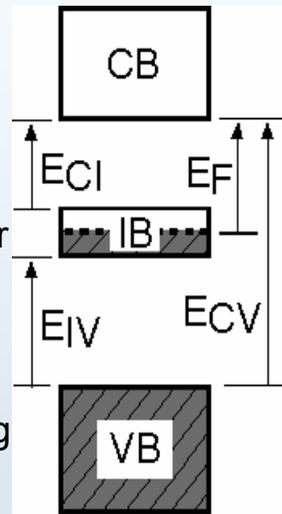


• Industry Impact:

- Identification of design rules and material systems allows practical implementation of quantum dot solar cells.
- QD solar cells give efficiency of 3-junction tandem with two materials.

• Significant Results:

- Demonstrated that proposed methods to increase efficiency can be grouped into 5 general classes.
- Developed models for band structure of multiple-energy-level quantum dot solar cells.
- Identified two non-idealities to be avoided in multiple-energy-level solar cells: valence band offsets & mini-bands.
- Identified material systems that allow ideal implementation of multiple-energy-level solar cell. All use InP as substrate.

• Graphics: Example ideal quantum dot band-structure: $\text{InAs}_{0.68}\text{P}_{0.32}/\text{GaAs}_{0.94}\text{Sb}_{0.06}/\text{InP}$

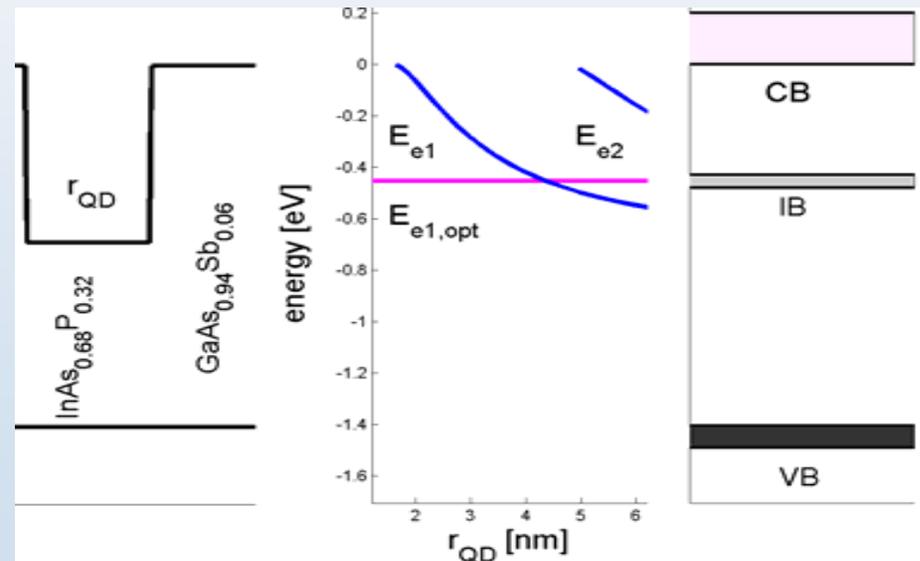

Quantum Dot Solar Cells



PI: Arthur J. Nozik, NREL (Collaborative Project with Office of Science/BES/Chemical Sciences)

• Research Objective:

To demonstrate multiple electron-hole pair (exciton) generation from single photons in quantum dots (QDs) and apply this effect to QD solar cells to produce greatly enhanced photocurrent and conversion efficiency

• Approach:

- Synthesize QDs that are expected to show greatly enhanced multiple exciton generation (MEG).
- Measure MEG using fs transient absorption spectroscopy.
- Develop and characterize nanocrystalline solar cells sensitized with QDs exhibiting efficient MEG and greater photocurrent.
- Model performance of QD solar cells showing efficient MEG.

• Industry Impact:


Ultra-high conversion efficiency in 3rd-generation solar cells will significantly reduce the cost of PV power.

• Significant Results:

1. Quantum yields of up to 300% (3 electron-hole pairs per photon) have been measured in PbSe and PbS quantum dots at photon energies 4 times the QD bandgap.
2. The enhanced performance and increased efficiency of QD solar cells based on MEG have been calculated.

• Graphics:

Quantum Yield

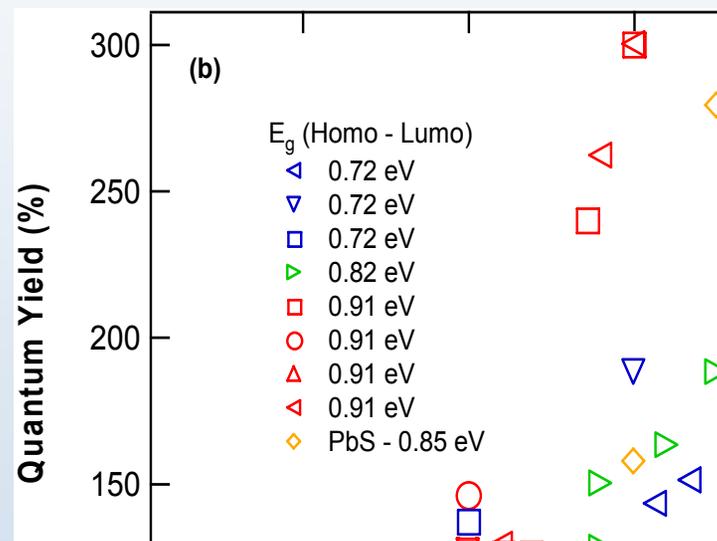

Quantum yield vs. photon energy (as ratio of QD bandgap) for PbSe and PbS QDs of different bandgaps (i.e., QD diameters).

(Published in: *NanoLetters*, **5**, 5, 865-871, May, 2005)

Research Objective:

Create high-efficiency concentrator cells for low-cost terrestrial photovoltaic applications

Approach:

- Lattice-matched multijunction.**
Develop new 1-eV material: GaInNAs.
- Lattice-mismatched multijunction.**
Grow lattice-matched GaInP and GaAs cells first, then mismatched GaInAs cell. Processing requires inversion and substrate removal.
- Multijunction on silicon.**
Active Si junction with III-V top cell. Results presented in Paris & Orlando


Industry Impact:

Once high-efficiency cells are developed, NREL will work with companies to implement these in concentrator systems. NREL also supports industry with a range of projects, studying the effects of changing spectrum on multijunction device design and performance.

Significant Results:

- Higher GaInNAs photocurrents obtained for MBE growth
- 37.9% efficiency for early prototype of inverted, lattice-mismatched GaInP/GaAs/GaInAs device, setting a new record


Graphics:

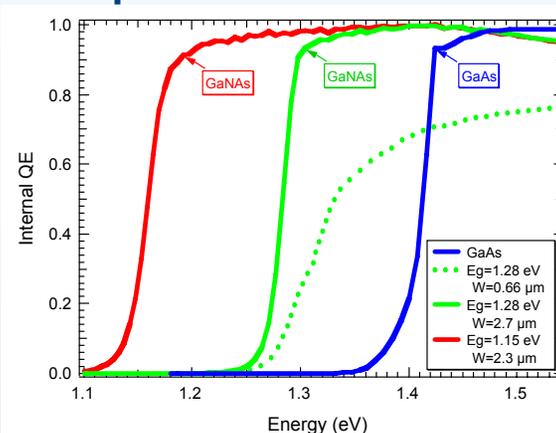

For MBE growth, N does not necessarily degrade the photocurrent.


Data courtesy of A. Ptak

The triple-junction, inverted cell was fabricated for the first time, yielding 37.9%

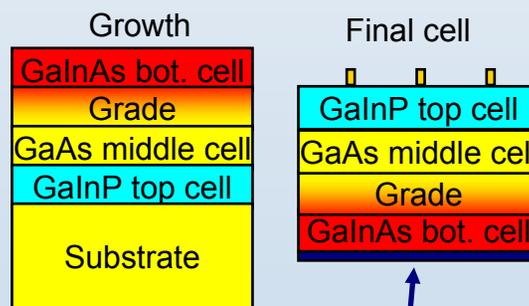

Patent by M. Wanlass

Metal

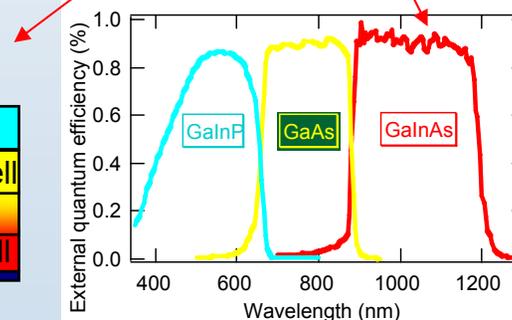

Efficiency @ 10 suns = 37.9%