


# Testing Small Wind Turbines at the National Renewable Energy Laboratory

## Preprint

K. Sinclair and A. Bowen

*To be presented at WindPower 2008  
Houston, Texas  
June 1–4, 2008*

**Conference Paper**  
**NREL/CP-500-43452**  
**June 2008**

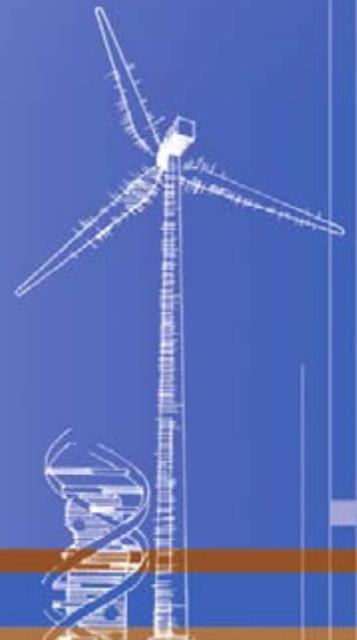

NREL is operated by Midwest Research Institute • Battelle Contract No. DE-AC36-99-GO10337



## NOTICE

The submitted manuscript has been offered by an employee of the Midwest Research Institute (MRI), a contractor of the US Government under Contract No. DE-AC36-99GO10337. Accordingly, the US Government and MRI retain a nonexclusive royalty-free license to publish or reproduce the published form of this contribution, or allow others to do so, for US Government purposes.

This report was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or any agency thereof.

Available electronically at <http://www.osti.gov/bridge>

Available for a processing fee to U.S. Department of Energy and its contractors, in paper, from:

U.S. Department of Energy  
Office of Scientific and Technical Information  
P.O. Box 62  
Oak Ridge, TN 37831-0062  
phone: 865.576.8401  
fax: 865.576.5728  
email: <mailto:reports@adonis.osti.gov>

Available for sale to the public, in paper, from:

U.S. Department of Commerce  
National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161  
phone: 800.553.6847  
fax: 703.605.6900  
email: [orders@ntis.fedworld.gov](mailto:orders@ntis.fedworld.gov)  
online ordering: <http://www.ntis.gov/ordering.htm>



## **Testing Small Wind Turbines at the National Renewable Energy Laboratory**

Karin Sinclair and Amy Bowen  
National Renewable Energy Laboratory  
National Wind Technology Center  
1617 Cole Blvd, Golden, CO 80401  
[Karin\\_sinclair@nrel.gov](mailto:Karin_sinclair@nrel.gov); 303 384-6946  
[Amy\\_Bowen@nrel.gov](mailto:Amy_Bowen@nrel.gov); 303 384-6931

### **Introduction**

Reducing barriers to wind energy expansion, stabilizing the market, and expanding the number of small wind turbine (SWT) systems installed in the United States are important goals for the Department of Energy's (DOE) Wind and Hydropower Technologies Program. One of the barriers for the distributed wind market is the lack of SWT systems that are independently tested and certified.

The National Renewable Energy Laboratory (NREL) has testing capabilities that are accredited by the American Association of Laboratory Accreditation (A2LA). Currently, NREL is one of only two facilities in the United States that are A2LA accredited. To help industry provide consumers with more certified SWT systems, DOE/NREL launched a project in 2007 called Independent Testing. Through a competitive solicitation, NREL selected four commercially available SWT systems to test in 2008/2009. The turbines will be tested to standards adopted by the International Electrotechnical Commission (IEC) and in compliance with the draft American Wind Energy Association (AWEA) standards for small wind turbine systems.

The resultant test data may be used by the Small Wind Certification Council (SWCC), a nonprofit organization formed with support from DOE, AWEA, state energy offices, and turbine manufacturers to certify SWT systems. Certification by the SWCC is expected to commence in 2009. Test data could also be submitted to a certifying body as partial input for international certification.

SWTs that are tested and certified will give consumers greater confidence that the systems they install will perform within specified wind regimes as advertised by the manufacturer.

### **Turbines Selected**

Of the four turbines selected from NREL's competitive solicitation, subcontracts have been executed with three of the turbine manufacturers (Mariah Power, Abundant Renewable Energy, and Gaia Wind). The fourth subcontract (Entegri Wind Systems) is awaiting subcontracting approval, which is anticipated to be completed in the summer of 2008. Each of the turbines in the current test cycle is described in the following section.

Mariah Power

Mariah Power's Windspire is a 1.2-kW vertical-axis Giromill wind turbine. The turbine's tower is 9.1-meters tall and its rotor area is 1.2 x 6.1 meters. The turbine has a permanent-magnet generator that has a single-phase output at 120 volts AC.



Mariah Power's Windspire Giromill wind turbine (NREL PIX 15704).

Abundant Renewable Energy

The Abundant Renewable Energy ARE 442 is a 10-kW 3-bladed horizontal-axis upwind turbine. It has a hub height of 30.9 meters and a rotor diameter of 7.2 meters. The turbine has a three-phase permanent-magnet generator that operates at variable voltages up to 410 volts AC.



Abundant Renewable Energy ARE 442 (NREL PIX 15734).

### Gaia-Wind

The Gaia-Wind 11-kW turbine is a three-phase induction generator that operates at 480 volts. The turbine's downwind rotor has a 13 meter diameter and its tower is 18 meters tall. The two-bladed, oversized rotor is designed for low to moderate wind speeds.



Gaia-Wind 11-kW turbine (NREL PIX 15705).

## Entegriy Wind Systems

The Entegriy Wind Systems EW50 is a 50-kW 3-bladed horizontal-axis downwind turbine. The turbine's rotor diameter is 15 meters and its hub height is 30.5 meters. It has a three-phase induction generator that operates at 480 volts AC.



Entegriy Wind Systems EW50 (NREL PIX 15568).

### **Tests and Testing Approach**

The suite of tests that will be conducted on each of the SWTs will include duration, power performance, acoustic noise emissions, safety and function, and power quality. Each is briefly described below. Tests are performed to IEC standards and in compliance with NREL's A2LA accredited Quality Assurance (QA) system. Duration, power performance, and safety and function test data will be collected using a National Instruments-based data acquisition system and compiled through custom LabVIEW software.

**Duration** testing is performed to summarize the turbine's performance over long periods of time. Test data will be sorted monthly into time classes specified by the standard and submitted to the client in an informal report. Duration testing will be performed according to IEC Standard 61400-2.

**Power performance** testing produces a power vs. wind speed graph to summarize the turbine's power generation performance at different wind speeds. This test will be performed according to IEC Standard 61400-12-1, referencing Appendix H for small

turbines. Data are analyzed for rejections based on wind direction, turbine status, and instrument readings, and then compiled through an Excel-based program to produce a power curve.

**Acoustic Noise Emissions** testing summarizes typical noise levels emitted from the turbine at different wind speeds. Sound data are recorded (one tower height plus half a rotor diameter down wind from the tower base) and processed using Noiselab software. Noise testing will be performed according to IEC Standard 61400-11.

**Safety and Function** testing is performed to verify the turbine displays the behavior it is designed to have as represented by the manufacturer. Features to be tested will be drawn from the wind turbine documentation and may possibly include additional NREL specified features. The testing will be conducted in accordance with IEC Standard 61400-2.

**Power Quality** testing will be performed on the Gaia-Wind 11-kW and Entegriy EW50 turbines according to IEC Standard 61400-21. This testing includes assessment of power, flicker, and harmonics levels for compliance with the standard. Turbines with a UL 1741 compliant inverter will not undergo power quality testing.

### **Accomplishments of the Project to Date**

After the four turbines were selected, two data-shed sites were developed, one existing and the other a new installation. With a possible second solicitation on the horizon, the data sheds, turbine sites, and data acquisition software were all designed to be non-turbine specific. The data sheds were outfitted with wire ways to allow easy installation and removal of data and power cables. Conduit was laid and buried from the data shed to the individual metrology tower sites to allow for future removal and new installation of power and data cables. In the case of future turbine installations, metrology tower locations will remain constant while turbine locations will vary depending on turbine sizing.

Custom data-acquisition software was developed in LabVIEW for duration, power performance, and safety and function tests. The software has built-in flexibility to allow for a varying number of data channels and signal types. This allows for minimal code-user interaction while setting up the software for new turbines.

Foundation kits for the four turbines were received ahead of the turbine system itself to allow time for foundation pouring and curing. NREL used a subcontractor for the foundation installations for the Gaia-Wind 11-kW turbine, ARE 442, and Entegriy EW50. The Windspire foundation was installed by NREL site operations crew.

The installation and commissioning of the Mariah Windspire was completed during the week of May 5, 2008; this was the first installation in the Independent Testing Project. The Gaia-Wind 11-kW turbine was installed and commissioned during the week of May

12, 2008. Installation and commissioning of the ARE 442 was completed the week of June 9, 2008.

Instrument calibration and laboratory check out (a process of validating that all systems are working as designed) to A2LA requirements and IEC recommendations have been completed for three of the turbine sites. NREL staff have completed the safety review and documentation that permit operation of the three installed turbines in an “unattended” mode. This permits the turbines to operate continuously as required for some of the test protocols. Data have been collected for several items in the safety and function test for the Gaia-Wind 11-kW turbine. Data are currently being collected for the duration and power performance tests for both the Windspire and the Gaia-Wind 11-kW turbines.

### **Plans to Expand with Second Solicitation**

DOE is planning a second competitive solicitation to test additional SWTs in the FY 2010 timeframe. It is anticipated that the second round RFP will be released in fall 2009. In addition, DOE/NREL may consider expanding this project to support testing additional SWT systems at the NREL site with funding from non-DOE sources.

### **For More Information**

For progress on DOE/NREL’s Independent Testing Project, go to NREL’s web page under a section titled Small Wind Turbine Independent Testing at: [http://nrel.gov/wind/technical\\_support.html](http://nrel.gov/wind/technical_support.html) Test reports will be posted as they become available.

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

**PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.**

<b>1. REPORT DATE (DD-MM-YYYY)</b> June 2008		<b>2. REPORT TYPE</b> Conference Paper		<b>3. DATES COVERED (From - To)</b> June 2008	
<b>4. TITLE AND SUBTITLE</b> Testing Small Wind Turbines at the National Renewable Energy Laboratory				<b>5a. CONTRACT NUMBER</b> DE-AC36-99-GO10337	
				<b>5b. GRANT NUMBER</b>	
				<b>5c. PROGRAM ELEMENT NUMBER</b>	
<b>6. AUTHOR(S)</b> K. Sinclair and A. Bowen				<b>5d. PROJECT NUMBER</b> NREL/CP-500-43452	
				<b>5e. TASK NUMBER</b> WER8.3001	
				<b>5f. WORK UNIT NUMBER</b>	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> National Renewable Energy Laboratory 1617 Cole Blvd. Golden, CO 80401-3393				<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> NREL/CP-500-43452	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>				<b>10. SPONSOR/MONITOR'S ACRONYM(S)</b> NREL	
				<b>11. SPONSORING/MONITORING AGENCY REPORT NUMBER</b>	
<b>12. DISTRIBUTION AVAILABILITY STATEMENT</b> National Technical Information Service U.S. Department of Commerce 5285 Port Royal Road Springfield, VA 22161					
<b>13. SUPPLEMENTARY NOTES</b>					
<b>14. ABSTRACT (Maximum 200 Words)</b> To describe the small wind turbine testing and certification program at NREL (NWTC).					
<b>15. SUBJECT TERMS</b> Wind; wind energy; small turbines; small turbine testing; Small Wind Certification Council; IEC; NWTC					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b> UL	<b>18. NUMBER OF PAGES</b>	<b>19a. NAME OF RESPONSIBLE PERSON</b>
<b>a. REPORT</b> Unclassified	<b>b. ABSTRACT</b> Unclassified	<b>c. THIS PAGE</b> Unclassified			<b>19b. TELEPHONE NUMBER (Include area code)</b>

Standard Form 298 (Rev. 8/98)  
Prescribed by ANSI Std. Z39.18