



Life Cycle Assessment of Thermal Energy Storage: Two-Tank Indirect and Thermocline

Garvin Heath, Craig Turchi, John Burkhardt and
Chuck Kutscher
National Renewable Energy Laboratory


Terese Decker
University of Colorado

*Presented at the American Society of Mechanical Engineers (ASME)
Third International Conference on Energy Sustainability
San Francisco, California
July 19-23, 2009*

Conference Paper
NREL/CP-6A2-45857
July 2009

NREL is operated for DOE by the Alliance for Sustainable Energy, LLC

Contract No. DE-AC36-08-GO28308

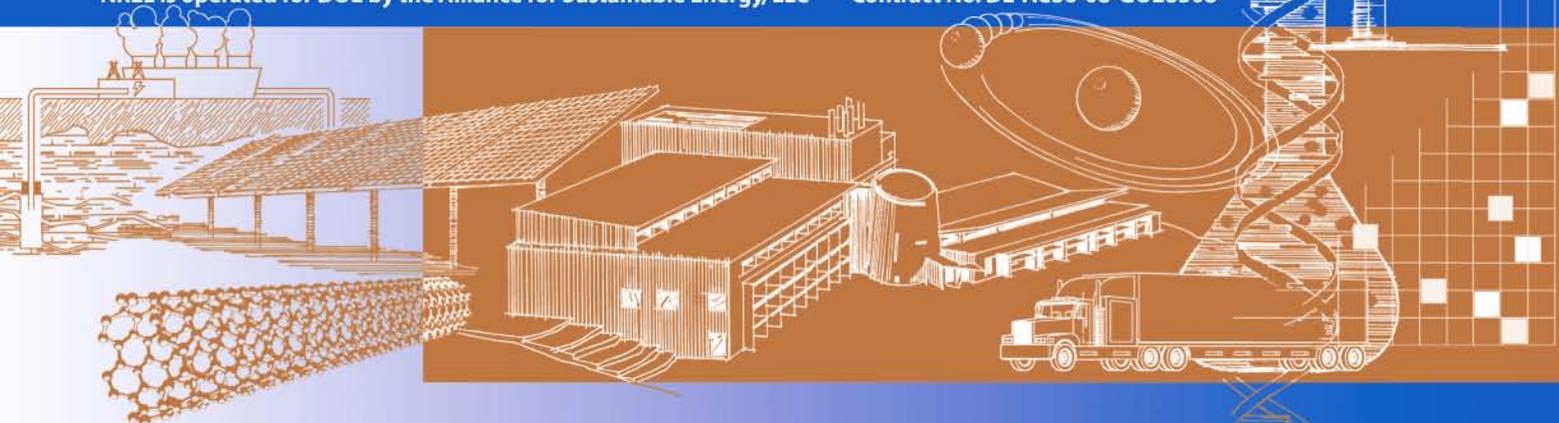

NOTICE

The submitted manuscript has been offered by an employee of the Alliance for Sustainable Energy, LLC (ASE), a contractor of the US Government under Contract No. DE-AC36-08-GO28308. Accordingly, the US Government and ASE retain a nonexclusive royalty-free license to publish or reproduce the published form of this contribution, or allow others to do so, for US Government purposes.

This report was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or any agency thereof.

Available electronically at <http://www.osti.gov/bridge>

Available for a processing fee to U.S. Department of Energy and its contractors, in paper, from:

U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831-0062
phone: 865.576.8401
fax: 865.576.5728
email: <mailto:reports@adonis.osti.gov>

Available for sale to the public, in paper, from:

U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
phone: 800.553.6847
fax: 703.605.6900
email: orders@ntis.fedworld.gov
online ordering: <http://www.ntis.gov/ordering.htm>



LIFE CYCLE ASSESSMENT OF THERMAL ENERGY STORAGE: TWO-TANK INDIRECT AND THERMOCLINE

Garvin Heath

Strategic Energy Analysis Center, National Renewable Energy Laboratory, Golden, CO

Craig Turchi

Electricity, Resources and Building Systems Integration Center, National Renewable Energy Laboratory, Golden, CO

Terese Decker

Department of Mechanical Engineering, University of Colorado, Boulder, CO

John Burkhardt

Strategic Energy Analysis Center, National Renewable Energy Laboratory, Golden, CO

Chuck Kutscher

Electricity, Resources and Building Systems Integration Center, National Renewable Energy Laboratory, Golden, CO

EXTENDED ABSTRACT

In the United States, concentrating solar power (CSP) is one of the most promising renewable energy (RE) technologies for reduction of electric sector greenhouse gas (GHG) emissions and for rapid capacity expansion. It is also one of the most price-competitive RE technologies, thanks in large measure to decades of field experience and consistent improvements in design. One of the key design features that makes CSP more attractive than many other RE technologies, like solar photovoltaics and wind, is the potential for including relatively low-cost and efficient thermal energy storage (TES), which can smooth the daily fluctuation of electricity production and extend its duration into the evening peak hours or longer.

Because operational environmental burdens are typically small for RE technologies, life cycle assessment (LCA) is recognized as the most appropriate analytical approach for determining their environmental impacts of these technologies, including CSP. An LCA accounts for impacts from all stages in the development, operation, and decommissioning of a CSP plant, including such upstream stages as the extraction of raw materials used in system components, manufacturing of those components, and construction of the plant.

The National Renewable Energy Laboratory (NREL) is undertaking an LCA of modern CSP plants, starting with those of parabolic trough design. Our LCA follows the guidelines described in the international standard series ISO 14040-44 [1]. To support this effort, we are comparing the life-cycle environmental impacts of two TES designs: two-tank, indirect molten salt and indirect thermocline. To put the environmental burden of the TES system in perspective, one recent LCA that considered a two-tank, indirect molten salt TES system on a parabolic trough CSP plant found that the TES component can account for approximately 40% of the plant's non-operational GHG emissions [2]. As emissions associated with plant construction, operation and decommissioning are generally small for RE technologies, this analysis focuses on estimating the emissions embodied in the production of the materials used in the TES system.

A CSP plant that utilizes an indirect, molten salt, TES system transfers heat from the solar field's heat transfer fluid (HTF) to the binary molten salts of the TES system via several heat exchangers. The "cold tank" receives the heat from the solar field HTF and conveys it to the "hot tank" via another series of heat exchangers. The

hot tank stores the thermal energy for power generation later in the day. A thermocline TES system is a potentially attractive alternative because it replaces the hot and cold tanks with a thermal gradient within a single tank that significantly reduces the quantity of materials required for the same amount of thermal storage. An additional advantage is that the thermocline design can replace much of the expensive molten salt with a low-cost quartzite rock or sand filler material.

This LCA is based on a detailed cost specification for a 50 MWe CSP plant with six hours of molten salt thermal storage, which utilizes an indirect, two-tank configuration [3]. This cost specification, and subsequent conversations with the author, revealed enough information to estimate weights of materials (reinforcing steel, concrete, etc.) used in all components of the specified two-tank TES system. To estimate embodied GHG emissions per kilogram of each material, two life cycle inventory (LCI) databases were consulted: EcoInvent v2.0 [4], which requires materials mass data as input, and the US Economic Input-Output LCA database [5], which requires cost data as input. IPCC default global warming potentials (GWPs) give the greenhouse potential of each gas relative to that of carbon dioxide [6]. Where certain materials specified in Kelly [3] were not available in the LCI databases, the closest available proxy for those materials was selected based on such factors as peak process temperature, and similar input materials and process technology. The thermocline system was modeled using the two-tank system design as the foundation, from which materials were subtracted or substituted based on the differences and similarities of design [7].

Table 1 summarizes the results of our evaluation. Embodied emissions of GHGs from the materials used in the 6-hour, 50 MWe two-tank system are estimated to be 17,100 MTCO_{2e}. Analogous emissions for the thermocline system are less than half of those for the two-tank: 7890 MTCO_{2e}. The reduction of salt inventory associated with a thermocline design thus reduces both storage cost and life cycle greenhouse gas emissions. While construction-, operation- and decommissioning-related emissions are not included in this assessment, we do not expect any differences between the two system designs to significantly affect the relative results reported here. Sensitivity analysis on choices of proxy materials for the nitrate salts and calcium silicate insulation also do not significantly affect the relative results.

REFERENCES

- [1] International Organization for Standardization (ISO). 2006. *Environmental management – Life cycle assessment – Requirements and guidelines*. ISO 14044:2006. Geneva, Switzerland. 46 pp.
- [2] Lechon Y, de la Rua C, Saez R, 2006. “Life Cycle Environmental Impacts of Electricity Production by Solar Thermal Technology in Spain.” Paper #B5-S5. 13th SolarPACES International Symposium, Seville, Spain, June 20-23, 2006.
- [3] Kelly B. 2008. *50 MWe_6 hour_Material quantities for Garvin Heath.xls*. Spreadsheet provided to Garvin Heath, National Renewable Energy Laboratory, on July 16, 2008, and subsequent personal communications on August 4 and 5, 2008.
- [4] Swiss Center for Life Cycle Inventories, 2008. *EcoInvent v2.0*, Duebendorf, Switzerland. Available at: <http://www.ecoinvent.org/>. Accessed July 2008 – February, 2009.

- [5] Carnegie Mellon University Green Design Institute. 2009. *Economic Input-Output Life Cycle Assessment (EIO-LCA)*, US 1997 Industry Benchmark model [Internet], Available from: <http://www.eiolca.net>. Accessed July, 2008 – February, 2009.
- [6] Forster, P., V. Ramaswamy, P. Artaxo, T. Berntsen, R. Betts, D.W. Fahey, J. Haywood, J. Lean, D.C. Lowe, G. Myhre, J. Nganga, R. Prinn, G. Raga, M. Schulz and R. Van Dorland, 2007, *Changes in Atmospheric Constituents and in Radiative Forcing*. In: *Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change* [Solomon, S., D. Qin, M. Manning, Z. Chen, M. Marquis, K.B. Averyt, M. Tignor and H.L. Miller (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.
- [7] Turchi C and Kutscher C. 2008. Personal communication with Garvin Heath and Terese Decker. July-August, 2008.

TABLE 1: COMPARISON OF THE EMBODIED LIFE-CYCLE GREENHOUSE GAS EMISSIONS FROM THE MATERIALS USED IN TWO-TANK INDIRECT AND THERMOCLINE INDIRECT MOLTEN SALT THERMAL ENERGY STORAGE SYSTEMS DESIGNED TO SUPPLY 6 HOURS OF THERMAL STORAGE FOR 50 MW CSP PLANTS

	MATERIAL	MATERIAL MASS [kg]		EMISSIONS (MTCO _{2e})	
		TWO-TANK	THERMOCLINE	TWO-TANK	THERMOCLINE
Thermal Mass	Silica Sand	-	17,900,000	-	376
	Molten Salt (40% Potassium Nitrate 60% Sodium Nitrate)	25,600,000	7,680,000	8,470	2,540
Oil-to-Salt Heat Exchanger	Calcium Silicate	77,800	38,900	4.9	2.4
	Stainless Steel	411,000	179,000	1850	927
Storage Tank(s)	Calcium Silicate	51,300	25,700	3.2	1.6
	Carbon Steel	885,000	456,000	1,270	654
	Mineral Wool	283,000	158,000	382	212
	Stainless Steel	6,110	3,080	31.7	16.0
Storage Tank Foundations	Carbon Steel	258,000	134,000	371	192
	Concrete	3,850,000	2,070,000	474	255
	Foam Glass	90,700	44,000	105	51.0
	Refractory Brick	667,000	432,000	1,540	996
Nitrogen Ullage System	Calcium Silicate	4,930	2,460	0.31	0.16
	Carbon Steel	20,000	17,900	28.7	25.8
	Nitrogen	429,000	28,100	184	12.1
Pumps	-	-	-	1,930	1,190
Compressors	-	-	-	6.6	6.6
Elevated Platform	Carbon Steel	194,000	194,000	278	279
	Concrete	1,290,000	1,290,000	159	159
TOTAL:				17,100	7890

Notes: Three significant figures are used to convey the uncertainty in the input data and assumptions. Materials listed are those specified in Kelly [3]; proxy materials were used for LCA modeling in some cases. Materials and masses are not reported for pumps and compressors because the EIO-LCA was used to estimate GHG emissions in those cases [5].

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.

1. REPORT DATE (DD-MM-YYYY) July 2009		2. REPORT TYPE Conference Paper		3. DATES COVERED (From - To)		
4. TITLE AND SUBTITLE Life Cycle Assessment of Thermal Energy Storage: Two-Tank Indirect and Thermocline			5a. CONTRACT NUMBER DE-AC36-08-GO28308			
			5b. GRANT NUMBER			
			5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) G. Heath, C. Turchi, J. Burkhardt, C. Kutscher, and T. Decker			5d. PROJECT NUMBER NREL/CP-6A2-45857			
			5e. TASK NUMBER PVB7.6301			
			5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Renewable Energy Laboratory 1617 Cole Blvd. Golden, CO 80401-3393			8. PERFORMING ORGANIZATION REPORT NUMBER NREL/CP-6A2-45857			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S) NREL			
			11. SPONSORING/MONITORING AGENCY REPORT NUMBER			
12. DISTRIBUTION AVAILABILITY STATEMENT National Technical Information Service U.S. Department of Commerce 5285 Port Royal Road Springfield, VA 22161						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT (Maximum 200 Words) In the United States, concentrating solar power (CSP) is one of the most promising renewable energy (RE) technologies for reduction of electric sector greenhouse gas (GHG) emissions and for rapid capacity expansion. It is also one of the most price-competitive RE technologies, thanks in large measure to decades of field experience and consistent improvements in design. One of the key design features that makes CSP more attractive than many other RE technologies, like solar photovoltaics and wind, is the potential for including relatively low-cost and efficient thermal energy storage (TES), which can smooth the daily fluctuation of electricity production and extend its duration into the evening peak hours or longer. Because operational environmental burdens are typically small for RE technologies, life cycle assessment (LCA) is recognized as the most appropriate analytical approach for determining their environmental impacts of these technologies, including CSP. An LCA accounts for impacts from all stages in the development, operation, and decommissioning of a CSP plant, including such upstream stages as the extraction of raw materials used in system components, manufacturing of those components, and construction of the plant. The National Renewable Energy Laboratory (NREL) is undertaking an LCA of modern CSP plants, starting with those of parabolic trough design.						
15. SUBJECT TERMS life-cycle assessment; concentrating solar power; CSP; solar; RE technologies; thermal energy storage; greenhouse gas emissions; GHG; TES						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON	
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code)	