NREL
NATIONAL RENEWABLE ENERGY LABORATORY

3D Thermal and Electrochemical Model for Spirally Wound Large Format Lithium-ion Batteries

218th ECS Meeting, Las Vegas, NV

Oct 14, 2010

Kyu-Jin Lee*, Gi-Heon Kim, Kandler Smith

NREL/PR-5400-49795

Objectives of this Study

Behaviors of spirally wound large format Li-Ion batteries are affected by macroscopic designs of cells.

- To develop thermal and electrochemical models resolving 3 dimensional spirally wound structures of cylindrical cells.
- To understand the mechanisms and interactions between local electrochemical reactions and macroscopic heat and electron transfers.
- To develop a tool and methodology to support macroscopic designs of cylindrical Li-Ion battery cells.

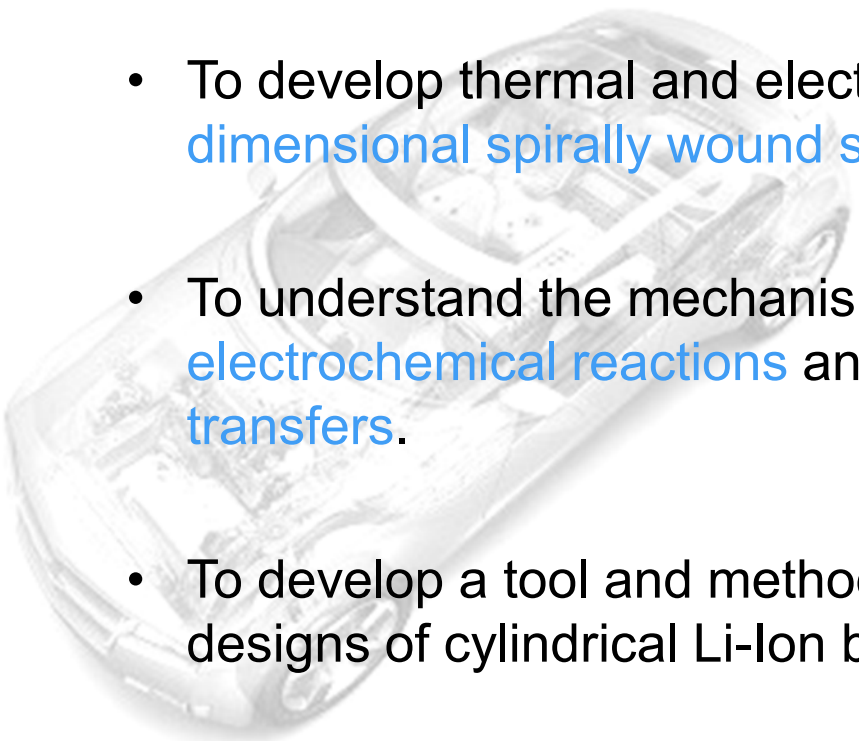

Multi-Scale Physics in Li-Ion Battery

Requirements & Resolutions

"Requirements" are usually defined in a macro-scale domain and terms

Performance
Life
Cost
Safety

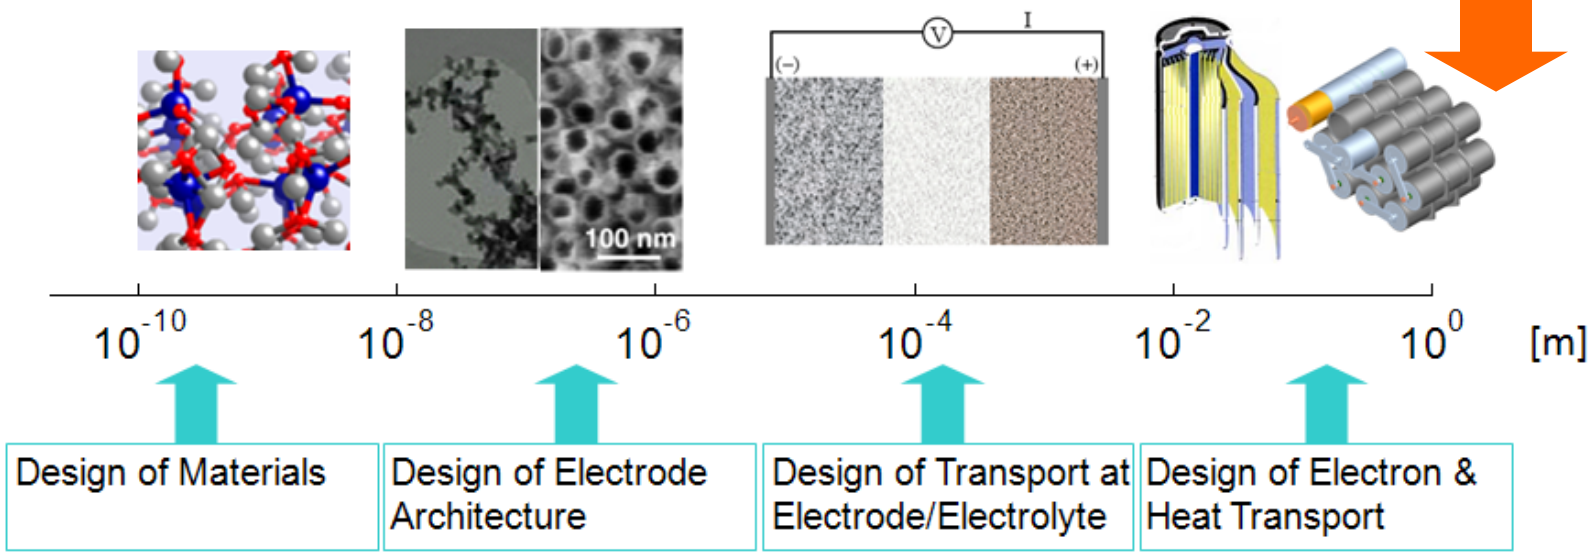

- Wide range of length and time scale physics
- Design improvements required at different scales
- Need for better understanding of interaction among varied scale physics

Multi-Physics Interaction - Previous study

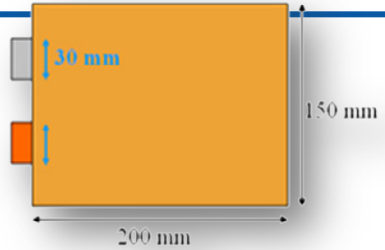

Comparison of two 40 Ah flat cell designs



- *Larger over-potential promotes faster discharge reaction*
- *Converging current causes higher potential drop along the collectors*

working potential

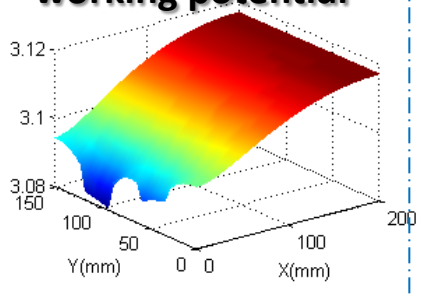

working potential

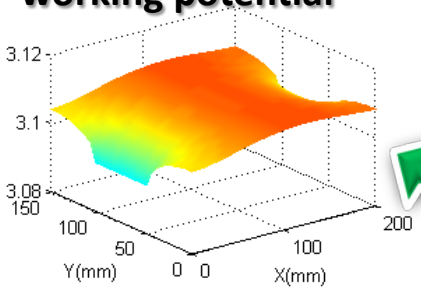

This cell is cycled more uniformly, can therefore use less active material ($) and has longer life.

transfer current generation

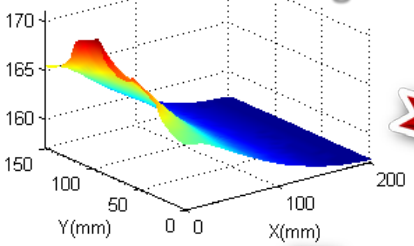

transfer current generation

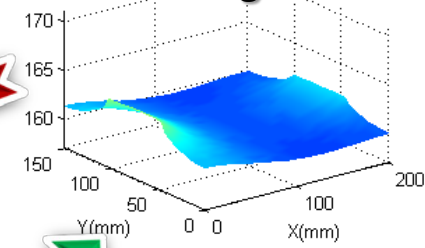

SOC

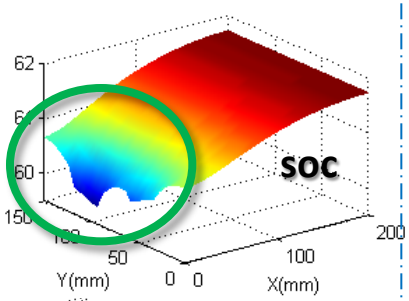

SOC

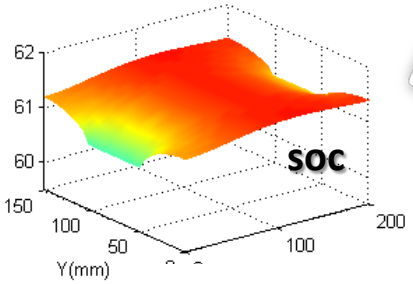

temperature

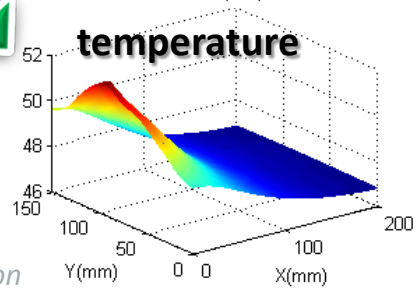

temperature

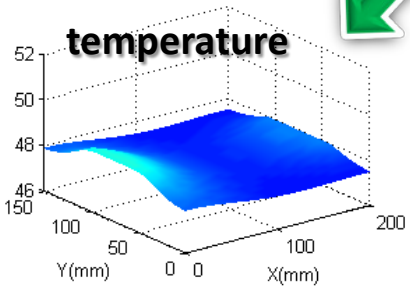

- *High temperature promotes faster electrochemical reaction*
- *Higher localized reaction causes more heat generation*

2 min
5C discharge

Porous Electrode Model

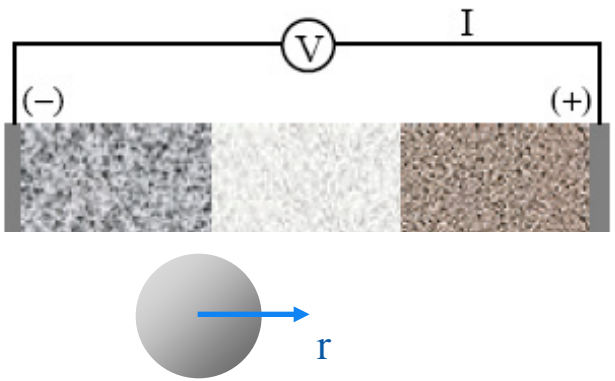

Charge Transfer Kinetics at Reaction Sites

$$j^{Li} = a_s i_o \left\{ \exp\left[\frac{\alpha_a F}{RT}\eta\right] - \exp\left[-\frac{\alpha_c F}{RT}\eta\right] \right\}$$

$$i_0 = k(c_e)^{\alpha_a}(c_{s,\max} - c_{s,e})^{\alpha_a}(c_{s,e})^{\alpha_c} \quad \eta = (\phi_s - \phi_e) - U$$

Species Conservation

$$\frac{\partial c_s}{\partial t} = \frac{D_s}{r^2}\frac{\partial}{\partial r}\left(r^2 \frac{\partial c_s}{\partial r}\right)$$

$$\frac{\partial(\varepsilon_e c_e)}{\partial t} = \nabla \cdot \left(D_e^{eff} \nabla c_e\right) + \frac{1 - t_+^o}{F} j^{Li} - \frac{\mathbf{i}_e \cdot \nabla t_+^o}{F}$$

Charge Conservation

$$\nabla \cdot \left(\sigma^{eff} \nabla \phi_s\right) - j^{Li} = 0$$

$$\nabla \cdot \left(\kappa^{eff} \nabla \phi_e\right) + \nabla \cdot \left(\kappa_D^{eff} \nabla \ln c_e\right) + j^{Li} = 0$$

Energy Conservation

$$\rho c_p \frac{\partial T}{\partial t} = \nabla \cdot (k \nabla T) + q'''$$

$$q''' = j^{Li}\left(\phi_s - \phi_e - U + T\frac{\partial U}{\partial T}\right) + \sigma^{eff} \nabla \phi_s \cdot \nabla \phi_s + \kappa^{eff} \nabla \phi_e \cdot \nabla \phi_e + \kappa_D^{eff} \nabla \ln c_e \cdot \nabla \phi_e$$

- Pioneered by Newman group (*Doyle, Fuller, and Newman 1993*)
- Captures ***lithium diffusion dynamics*** and ***charge transfer kinetics***
- Predicts ***current/voltage response*** of a battery
- Provides design guide for thermodynamics, kinetics, and transport across electrodes

- **Difficult to resolve *heat* and *electron current* transport in large cell systems**

Porous Electrode Model

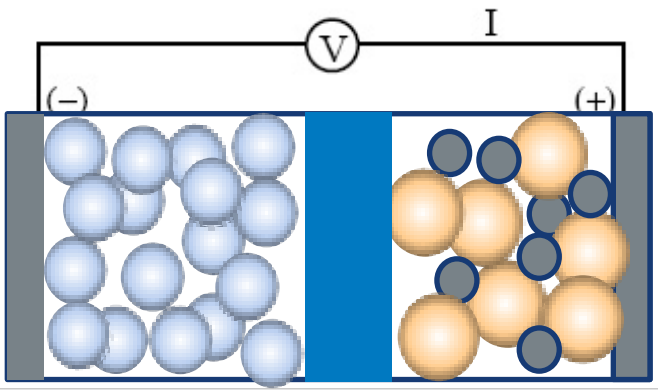

Charge Transfer Kinetics at Reaction Sites

$$j^{Li} = a_s i_o \left\{ \exp\left[\frac{\alpha_a F}{RT}\eta\right] - \exp\left[-\frac{\alpha_c F}{RT}\eta\right] \right\}$$

$$i_0 = k(c_e)^{\alpha_a}(c_{s,\max} - c_{s,e})^{\alpha_a}(c_{s,e})^{\alpha_c} \quad \eta = (\phi_s - \phi_e) - U$$

Species Conservation

$$\frac{\partial c_s}{\partial t} = \frac{D_s}{r^2}\frac{\partial}{\partial r}\left(r^2 \frac{\partial c_s}{\partial r}\right)$$

$$\frac{\partial(\varepsilon_e c_e)}{\partial t} = \nabla \cdot \left(D_e^{eff} \nabla c_e\right) + \frac{1 - t_+^o}{F} j^{Li} - \frac{\mathbf{i}_e \cdot \nabla t_+^o}{F}$$

Charge Conservation

$$\nabla \cdot \left(\sigma^{eff} \nabla \phi_s\right) - j^{Li} = 0$$

$$\nabla \cdot \left(\kappa^{eff} \nabla \phi_e\right) + \nabla \cdot \left(\kappa_D^{eff} \nabla \ln c_e\right) + j^{Li} = 0$$

Energy Conservation

$$\rho c_p \frac{\partial T}{\partial t} = \nabla \cdot (k \nabla T) + q'''$$

$$q''' = j^{Li}\left(\phi_s - \phi_e - U + T\frac{\partial U}{\partial T}\right) + \sigma^{eff} \nabla \phi_s \cdot \nabla \phi_s + \kappa^{eff} \nabla \phi_e \cdot \nabla \phi_e + \kappa_D^{eff} \nabla \ln c_e \cdot \nabla \phi_e$$

- Pioneered by Newman group (*Doyle, Fuller, and Newman 1993*)
- Captures ***lithium diffusion dynamics*** and ***charge transfer kinetics***
- Predicts ***current/voltage response*** of a battery
- Provides design guide for thermodynamics, kinetics, and transport across electrodes

- **Difficult to resolve *heat* and *electron current* transport in large cell systems**

Multi-Scale Multi-Dimension (MSMD) Model

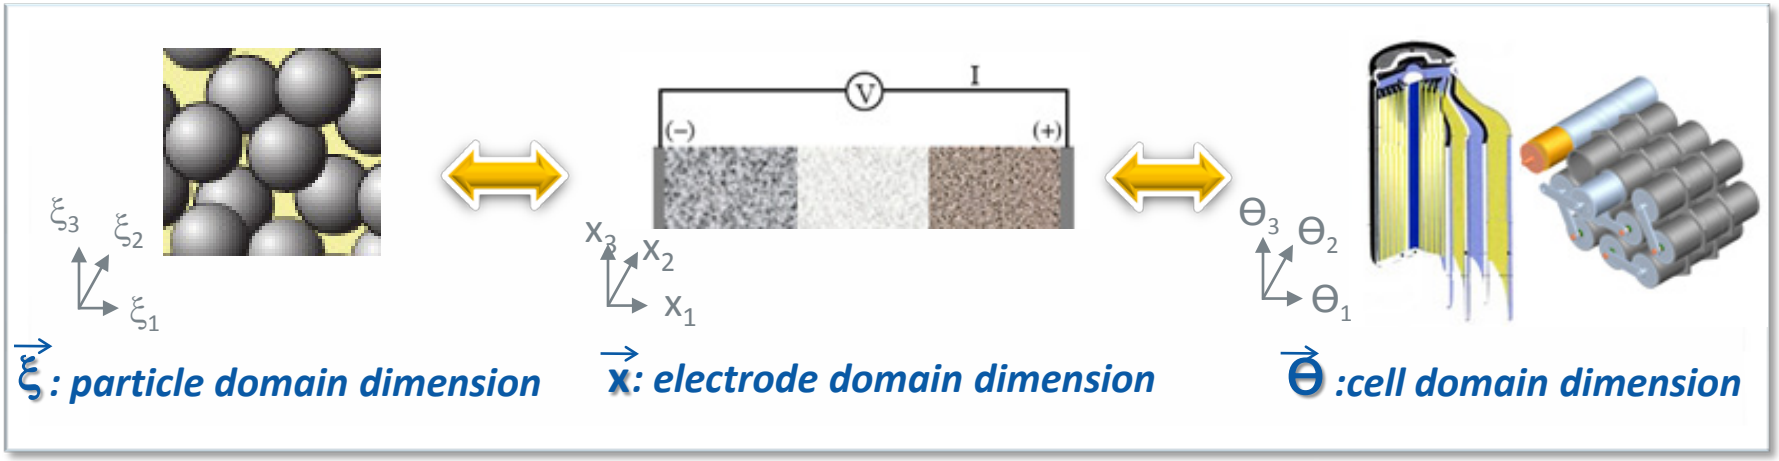

- Introducing separate computational domains for corresponding length scale physics
- Geometry decoupling between the domains
- Using independent coordinate systems for each domain
- Two-way coupling of solution variables using multi-scale model schemes

- Selectively resolve higher spatial resolution for smaller characteristic length scale physics
- Achieve high computational efficiency
- Provide flexible & expandable modularized framework

Large Cell Design Issues

Prismatic cell

- *Stacking electrodes coated on metal current collectors*
- *Less efficient manufacturing processes for mass production*

Cylindrical cell

- *Rolling electrodes coated on metal current collectors*
- *Well established manufacturing process for small batteries*
- *More difficulties for large cell design (cf. **tap design**, heat management, etc)*

Large Cell Design Issues

Prismatic cell

- *Stacking electrodes coated on metal current collectors*
- *Less efficient manufacturing processes for mass production*

Cylindrical cell

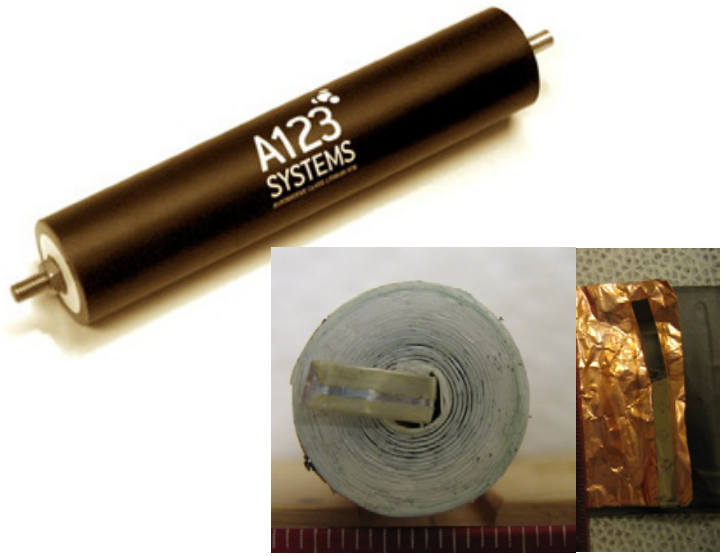

- *Rolling electrodes coated on metal current collectors*
- *Well established manufacturing process for small batteries*
- *More difficulties for large cell design (cf. **tap design**, heat management, etc)*

Previous Development of Wound Cell Model

Applicable to continuous tab design

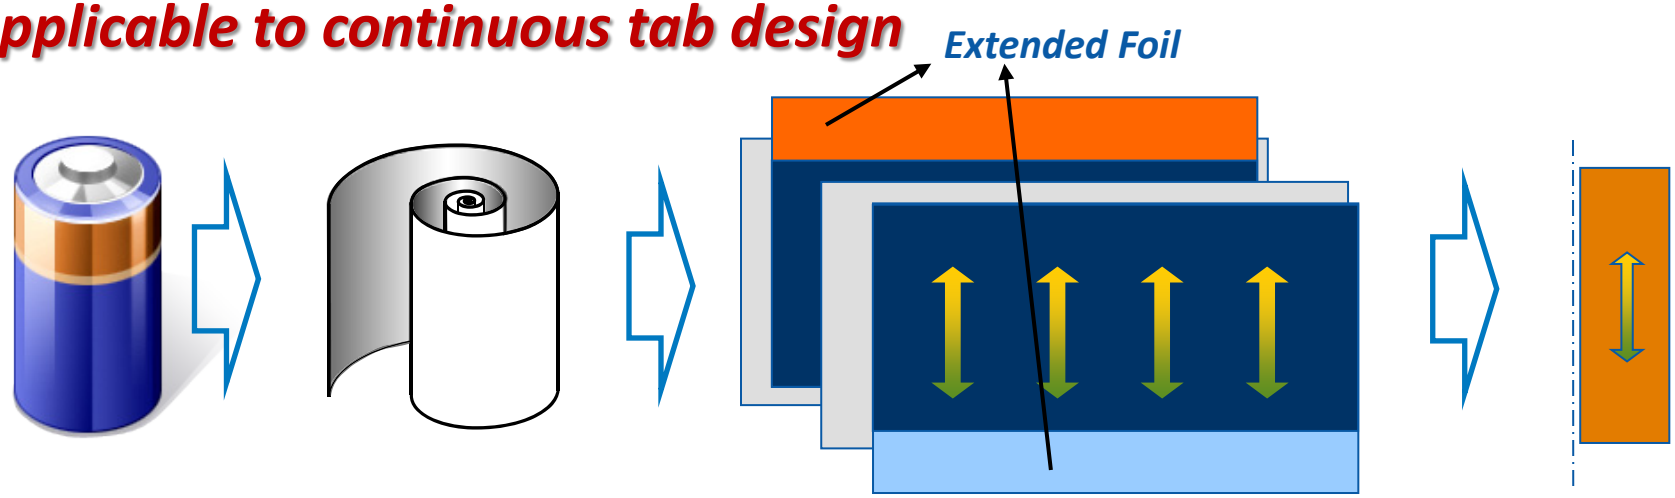

Cylindrical cell

Unwinding jellyrolls

continuous tab design

Axisymmetric assumption

Sub-model choice for spirally wound continuous tab cells *- Previous study*

: particle domain sub-model



1D spherical particle representation model

: electrode domain sub-model

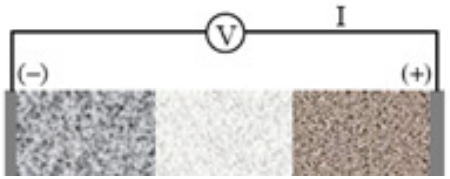

1D porous electrode model

:cell domain sub-model



2D axisymmetric cell model

Tab-less Wound Cell Design Evaluation

Effects of "Aspect Ratio" of a Cylindrical Cell *- Previous study*

10s pulse power capability comparison

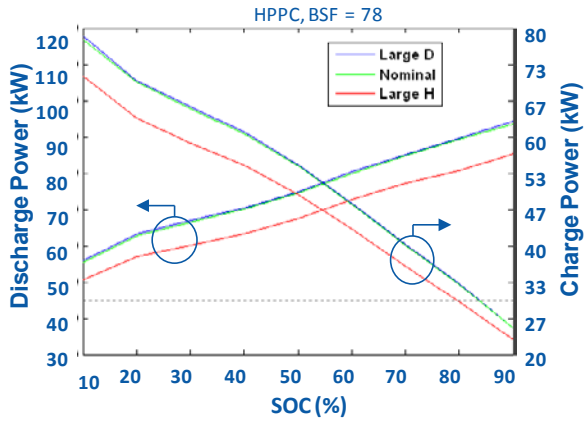

- Large H design has almost 10% less power capability.

9 min 5C discharge

Large D D[mm]: 115 H[mm]: 20

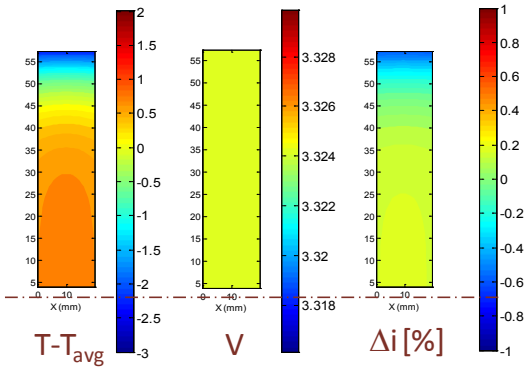



Large H D[mm]: 14 H[mm]: 350

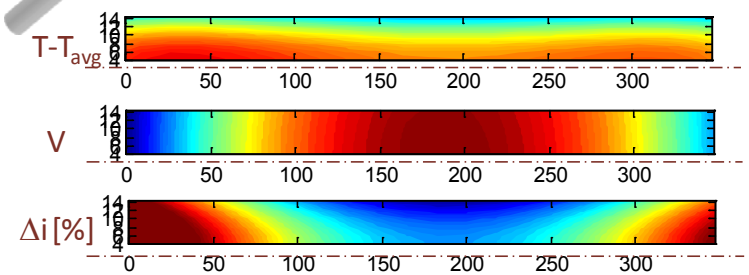

Nominal D[mm]: 50 H[mm]: 107

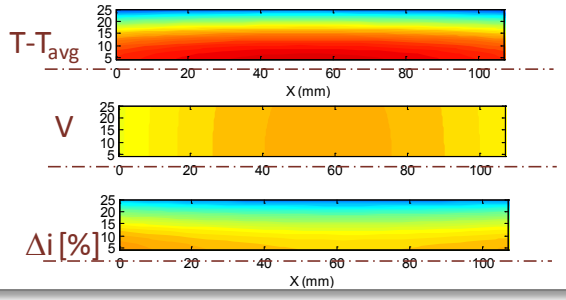

Present Study

Tab configuration: number & size

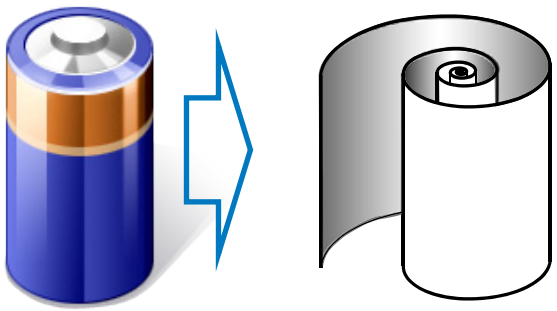

Cylindrical cell Unwinding jellyrolls

- 2D axisymmetric model is not applicable to a wound cell with a finite number of current tabs where lateral electric current is not negligible in current collector foils.
- Geometries and materials of electric current paths in spirally wound layer structure should be properly resolved.

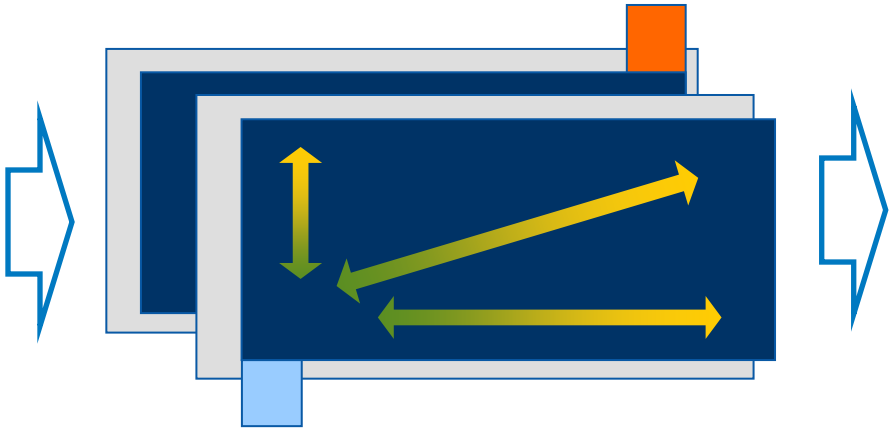

Current flows along the winding direction

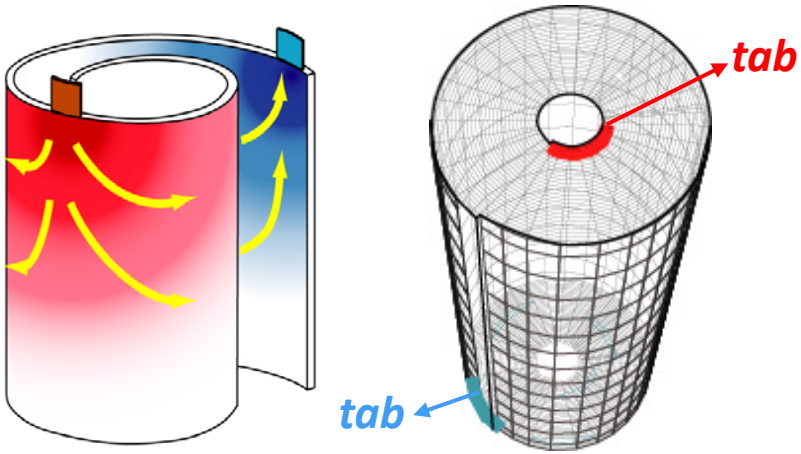

3 dimensional spiral wound geometry

New Development of Cell Domain Model

Spirally Wound Cell Model:

Unit structure: ***Double Paired Electrodes on Single-Paired Current Collectors***

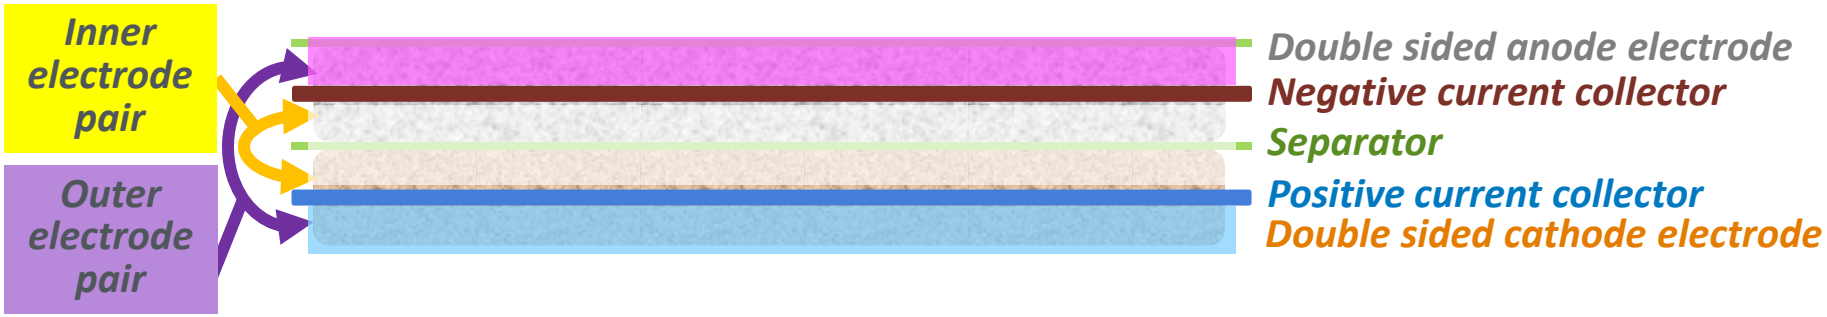

Winding: ***Alternating Radial Placement of Double Paired-Electrodes***

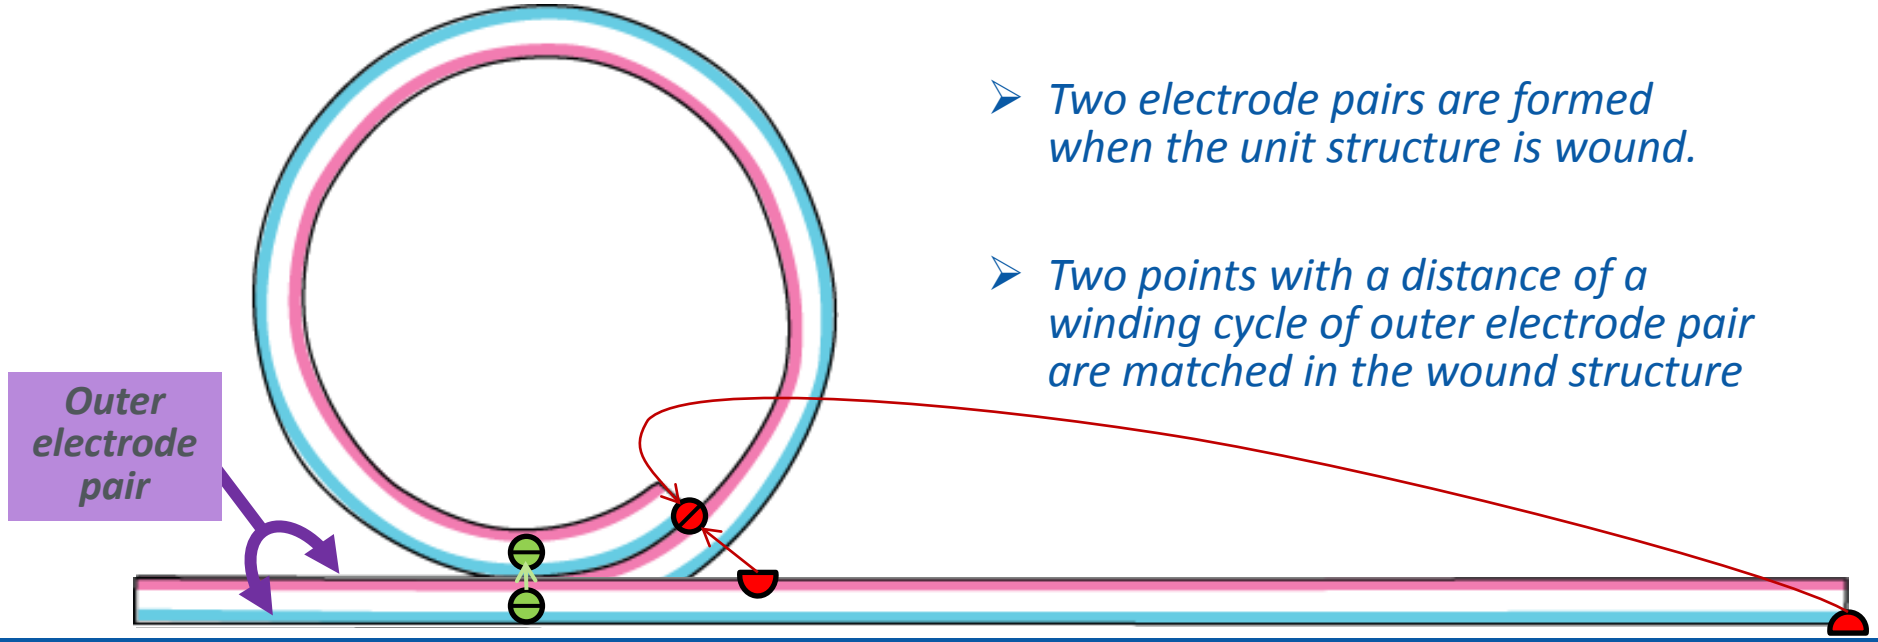

- *Two electrode pairs are formed when the unit structure is wound.*
- *Two points with a distance of a winding cycle of outer electrode pair are matched in the wound structure*

Spiral cell structures

Alternatively layered jelly roll

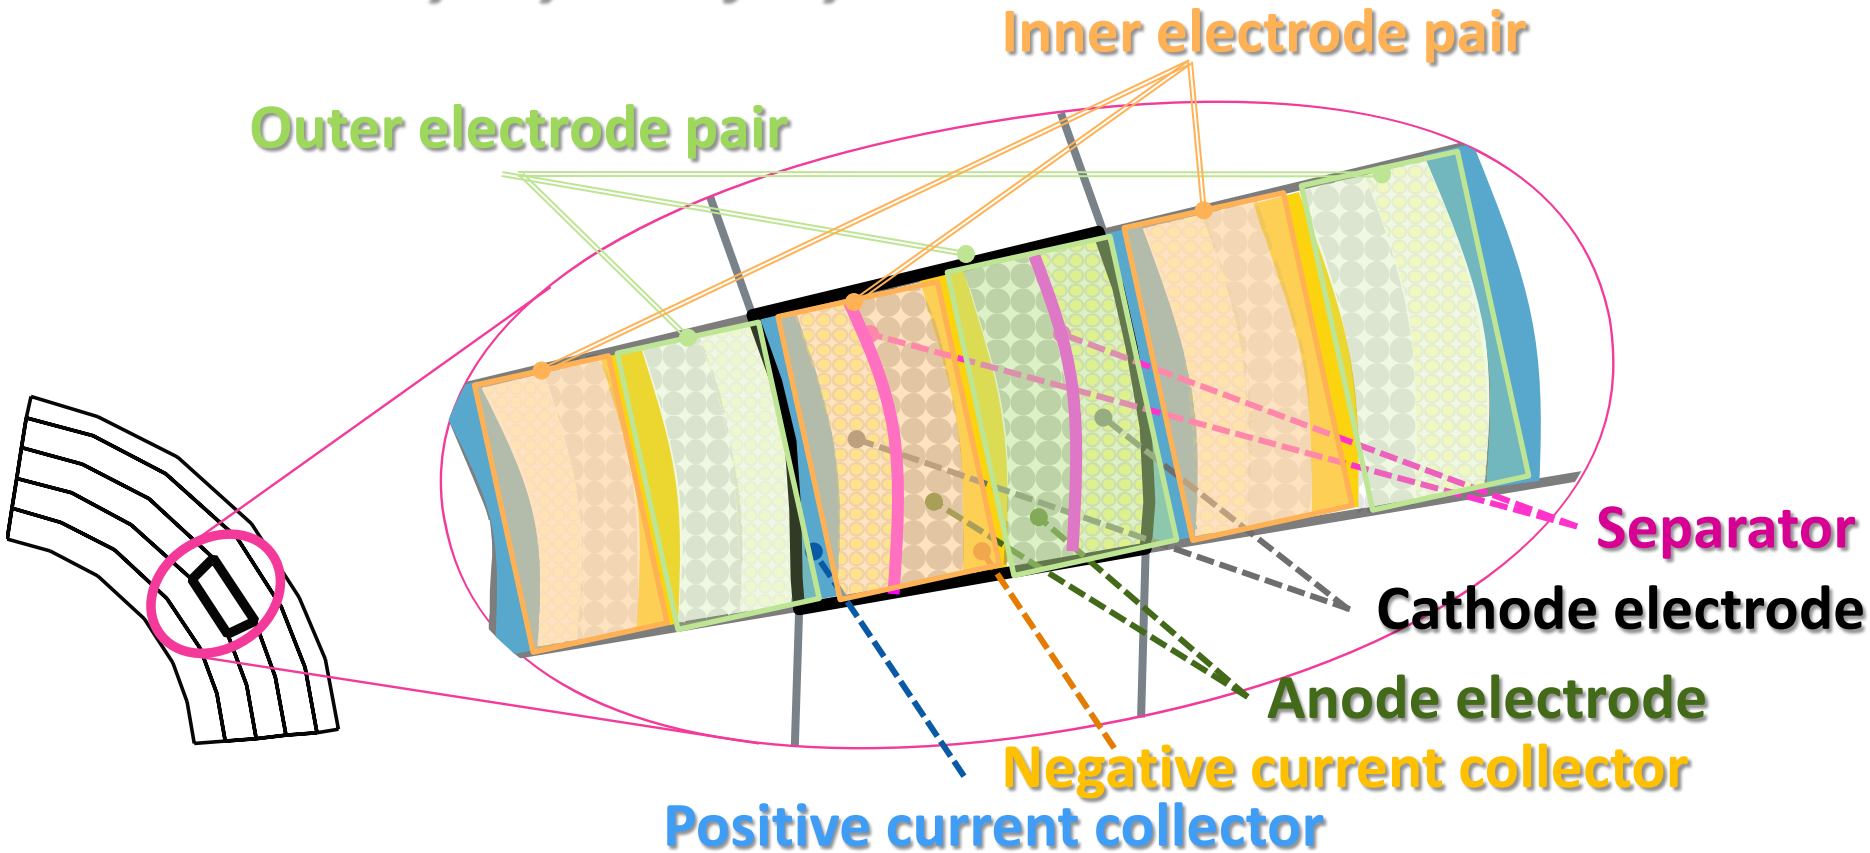

A current collector has two electrode pairs in both sides.

Spiral cell structures

Non-uniform electrical potential along current collectors
Non-uniform charge transfer reaction

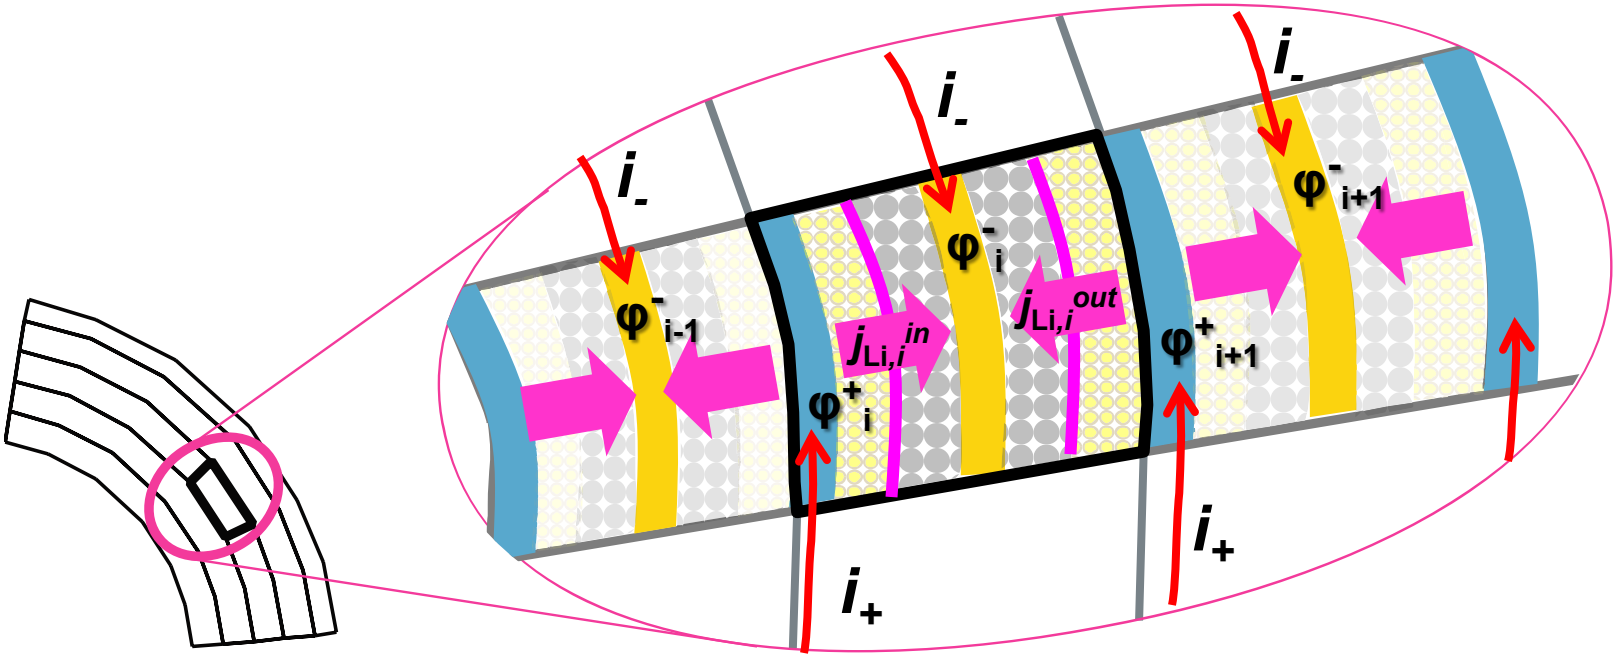

We cannot expect uniform potential along the current collectors due to inevitable electric current in winding direction.

Modeling case

- ✓ Diameter 40mm, inner diameter 8mm, height 100 mm form factor
- ✓ Positive tabs on the top side, negative tabs on the bottom side
- ✓ 10 Ah capacity

Tab locations for 5 tab case

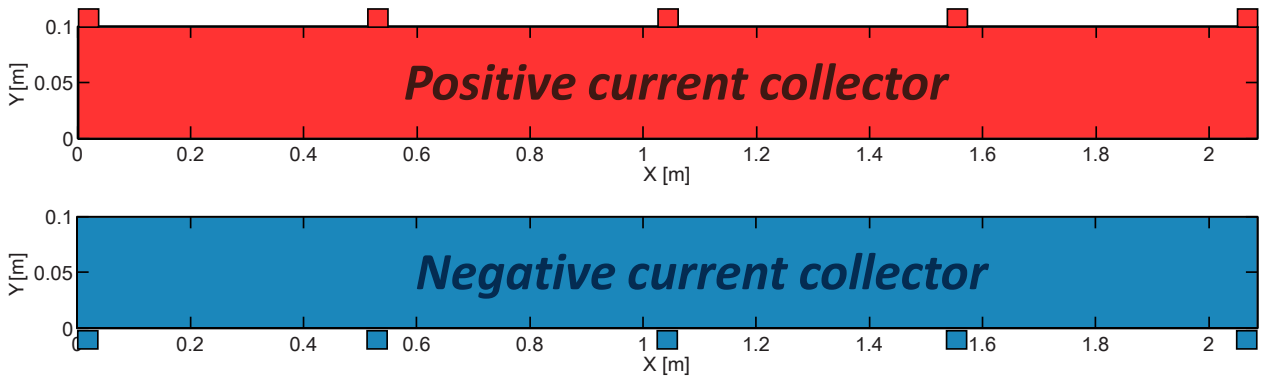

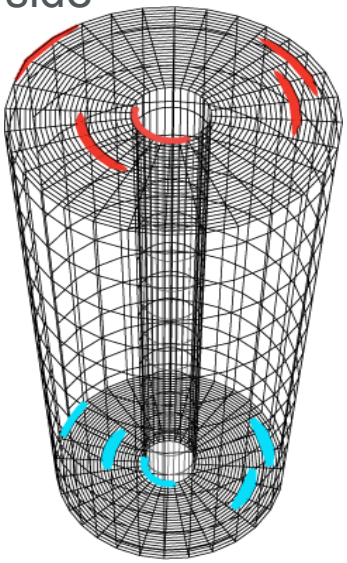

Tab configuration of each electrode pairs

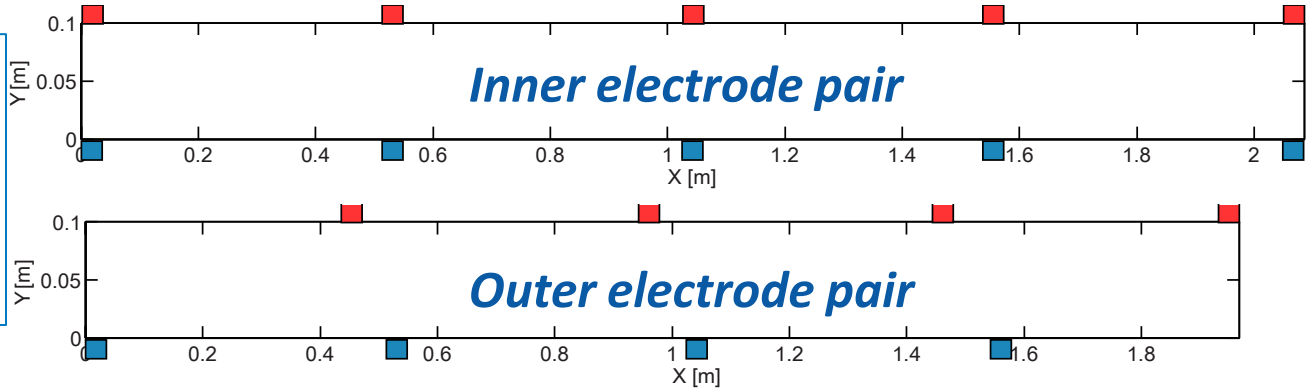

5C constant current discharge
soc_{ini} = 90%
Natural convection :
h_{inf} = 5 W/m²K
T_{amb} = 25°C
T_{ini} = 25°C

Modeling results

- *5 tabs in each current collector*
- *5C discharge for 5 min*

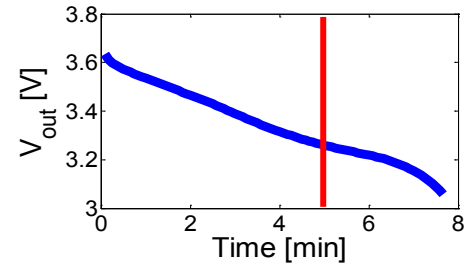

Electric potential

Top view



Bottom view



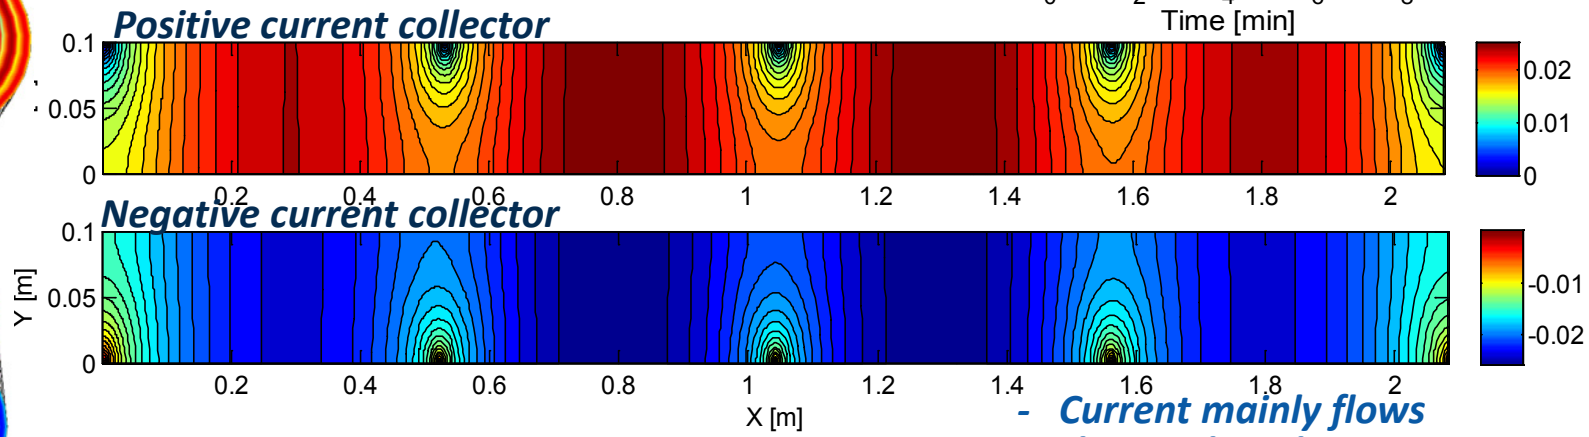

- *Current mainly flows in the winding direction*

Electrochemical reaction rate

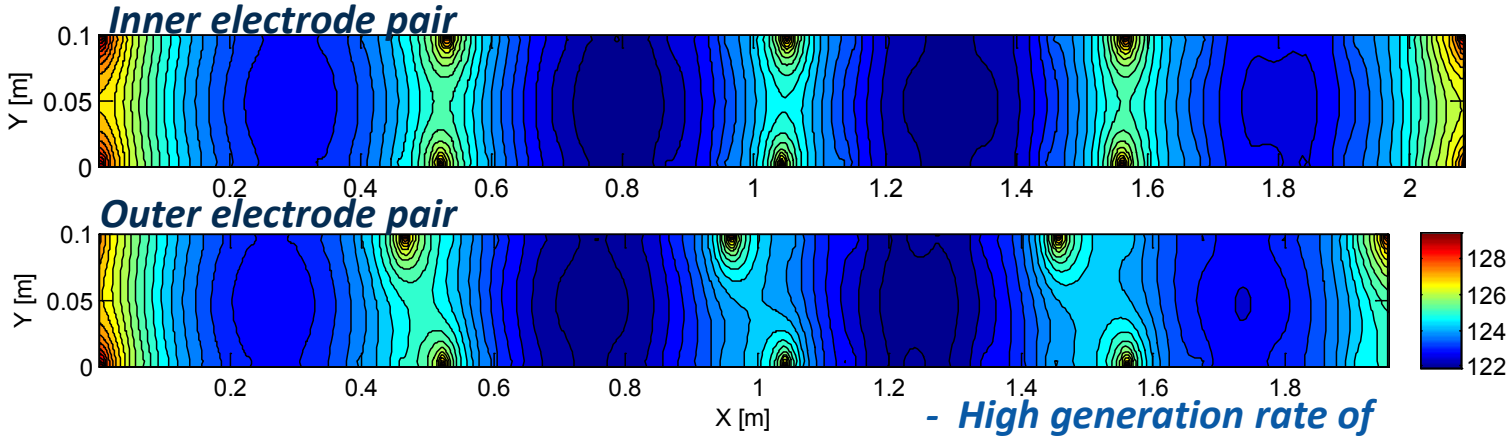

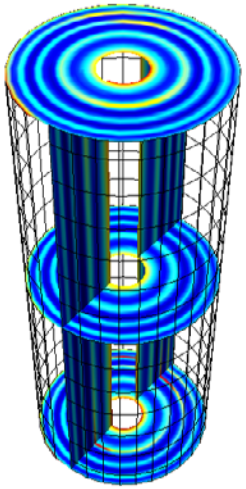

- *High generation rate of transfer current near tabs*

Modeling results

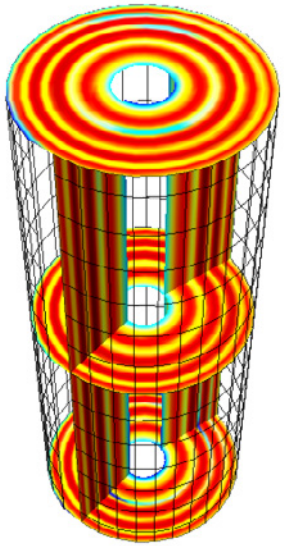

State of charge

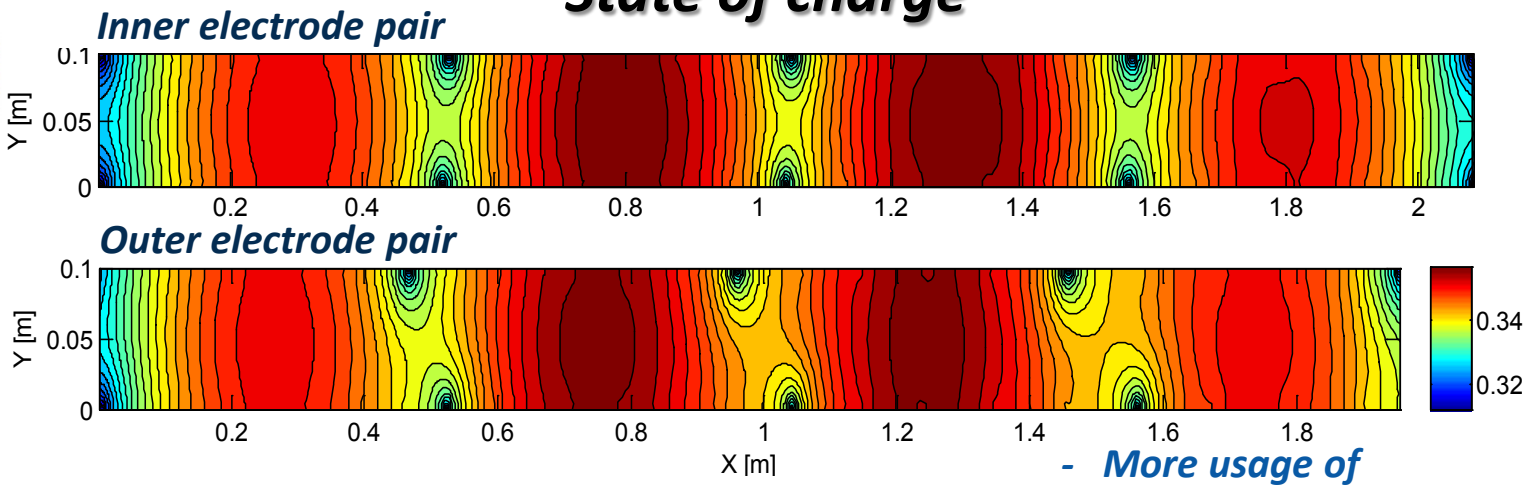

- *More usage of electrode near tabs*

Temperature

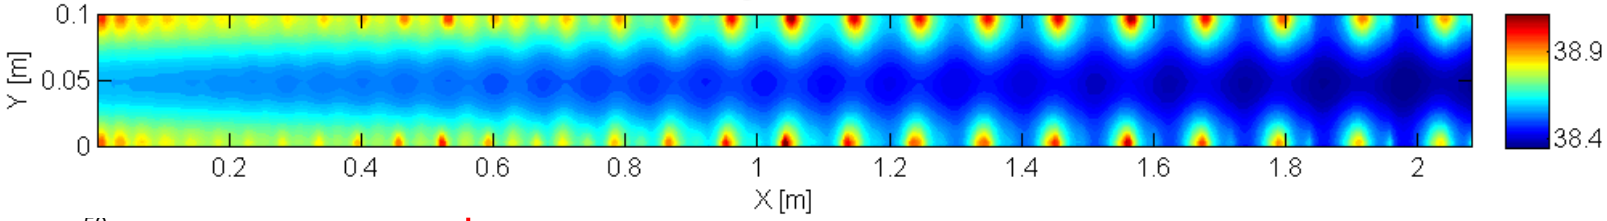

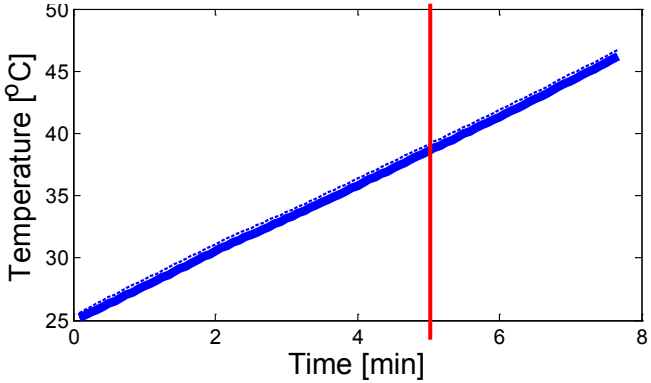

- *High rate discharge with a moderate heat transfer condition*
- *Heat generation dominates temperature distribution in the system.*
- *Temperature difference in the system is relatively small yet.*

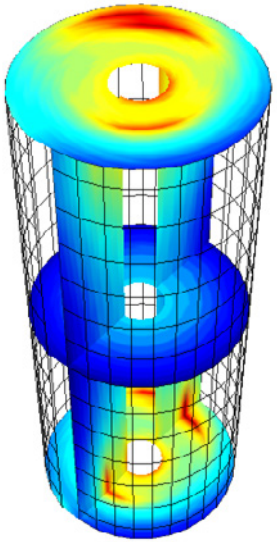

Modeling results

Parametric study

- *Different tab numbers (2,5,10 and continuous tab) on cell performance*
- *10 Ah capacity, 5C discharge*

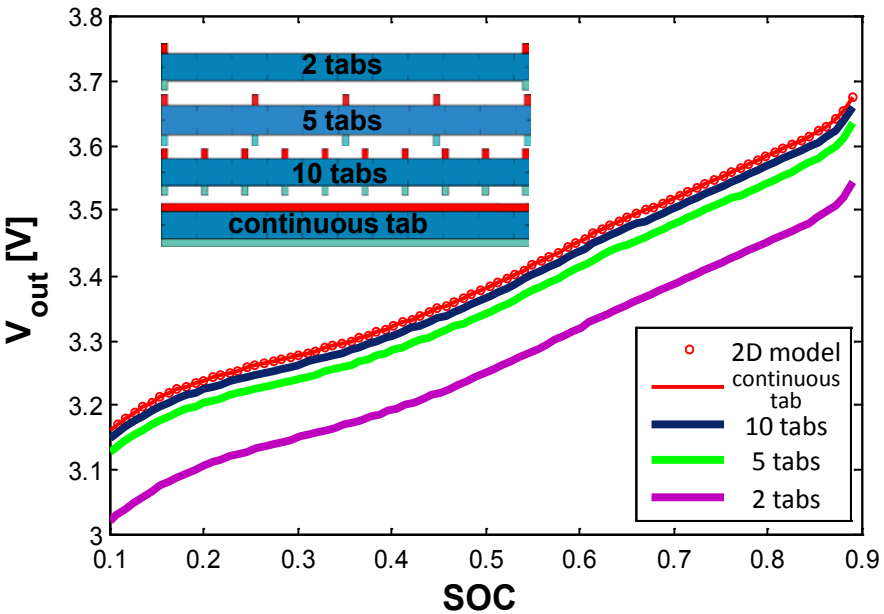

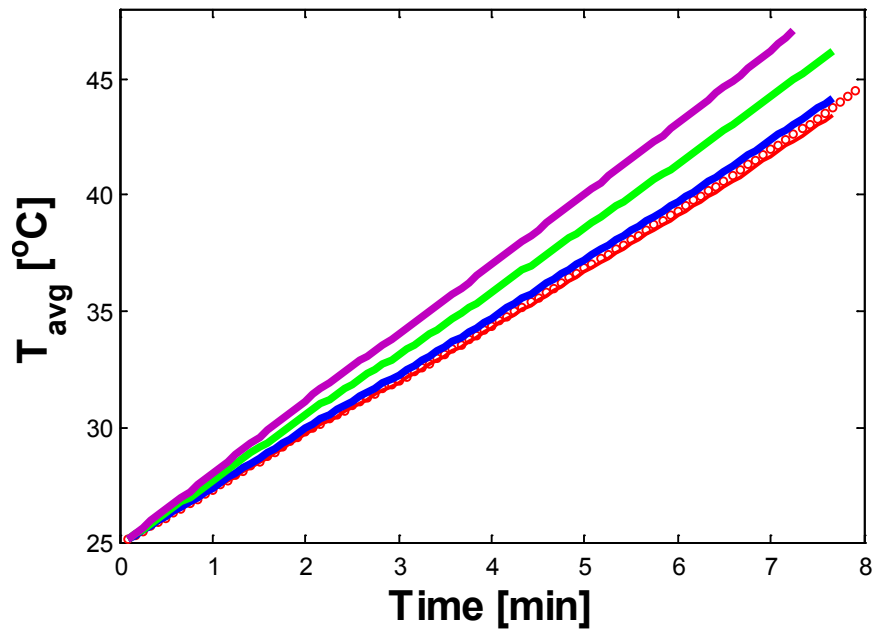

soc_{ini} = 90%
Natural convection :
h_{inf} = 5 W/m^{2}K
T_{amb} = 25°C
T_{ini} = 25°C

Cells with fewer tabs …

- ***lower output voltage***
- ***higher average temperature***

Modeling results - Parametric study

Electrochemical reaction rate comparison

in the inner electrode pair at 5 min

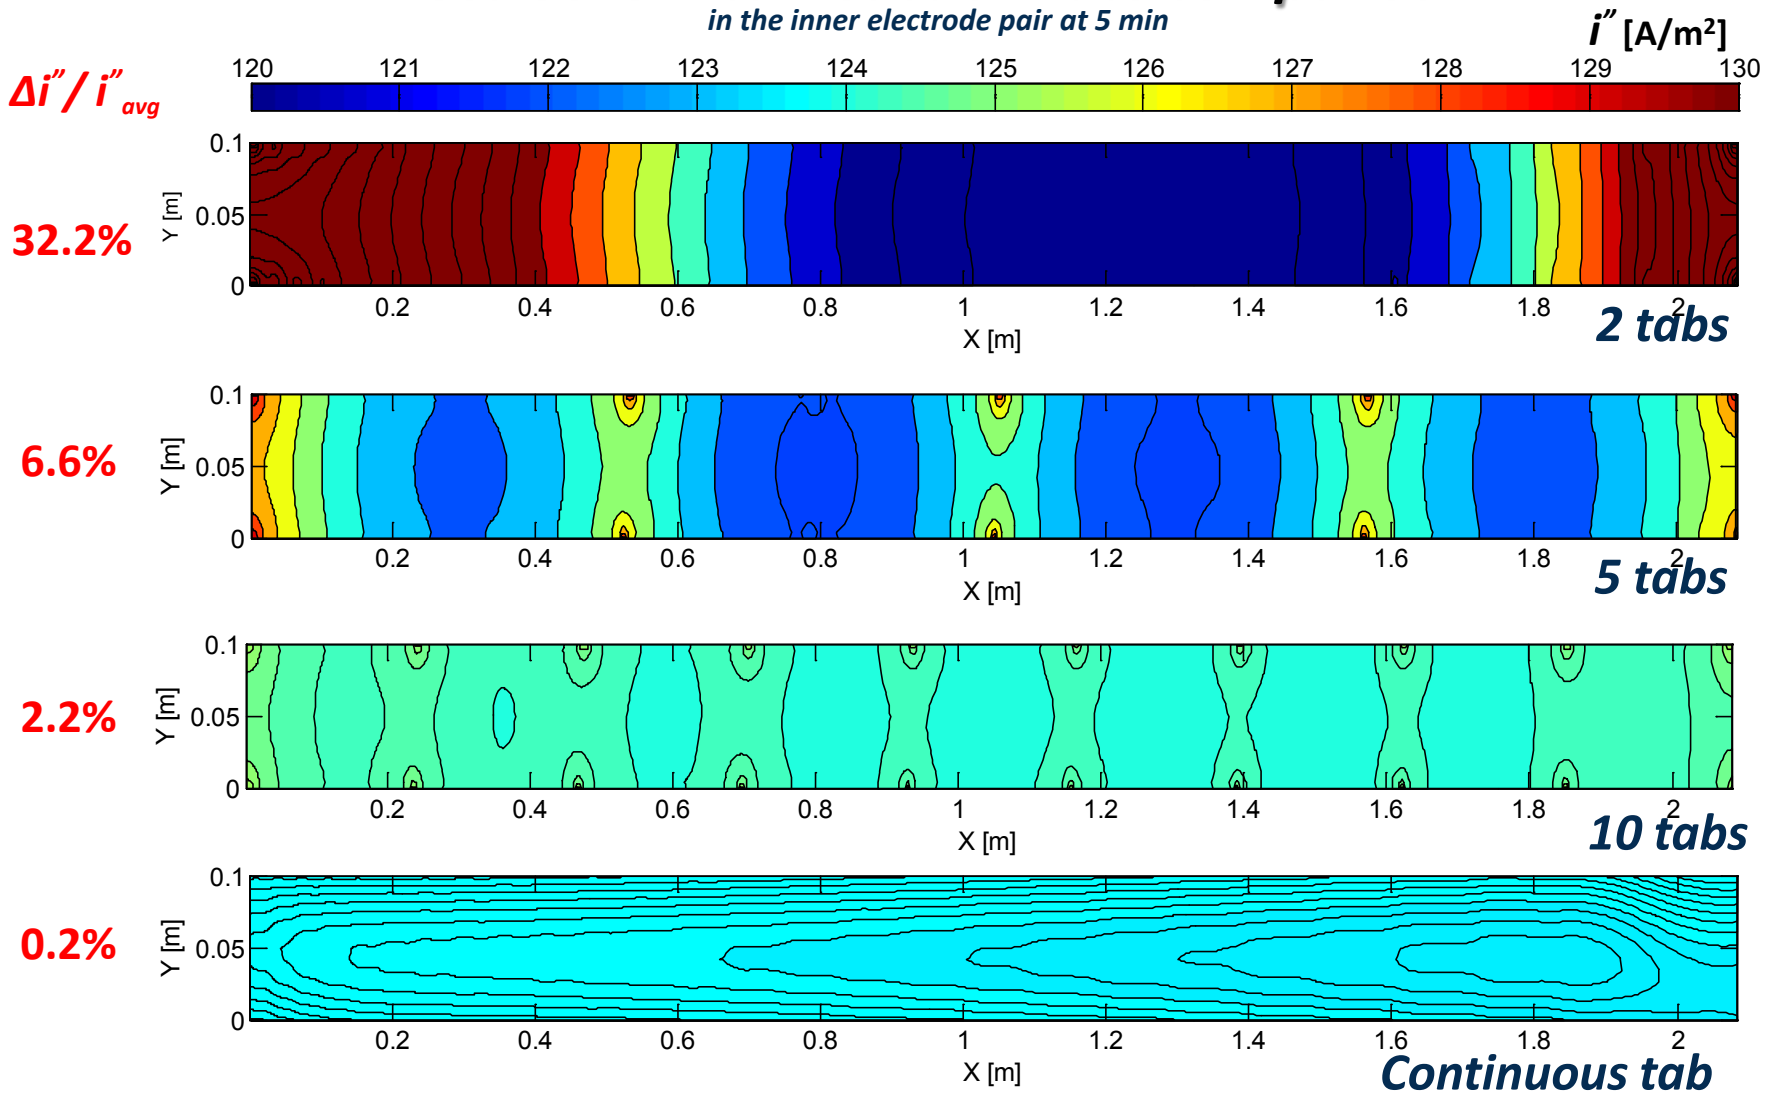

Modeling results - Parametric study

Temperature deviation comparison

at 5 min

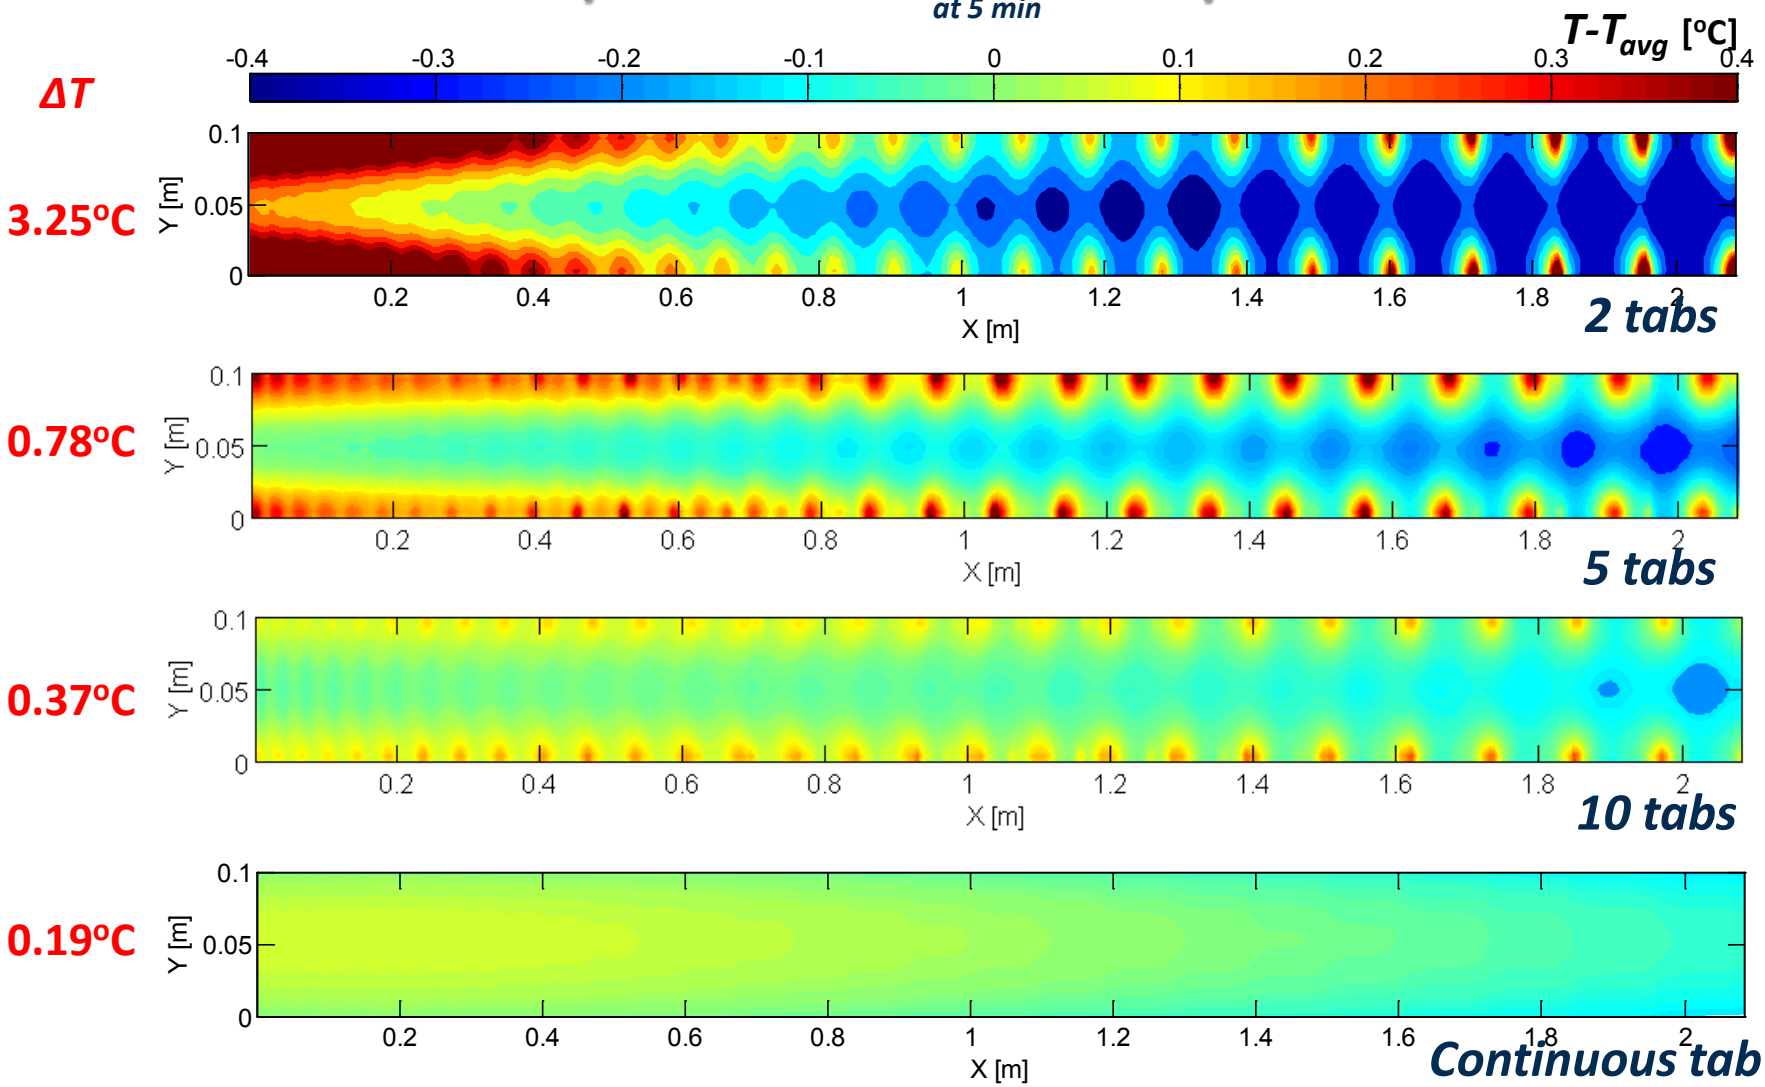

Conclusion

- ***A Multi-Scale Multi-Dimension model*** *was used for evaluating large format automotive cell designs by integrating micro-scale electrochemical process and macro-scale heat and electrical current transports.*
- *Spatial non-uniformity of battery physics, which becomes significant in large batteries, cause unexpected performance in spiral wound lithium-ion batteries.*
- ***A macro-scale domain model based on spirally wound structures*** *of lithium-ion batteries was developed to understand* ***effects of tab configurations*** *and* ***the double sides electrodes structure****.*
- *Spiral wound cells with more tabs would be preferable to manage cell internal heat and electron current transport, and consequently to achieve uniform electrochemical kinetics over a system.*
- *The spiral wound cell model can provide* ***quantitative data*** *in terms of finding the optimum number of tabs to battery manufacturers.*

Acknowledgments

US. Department of Energy, Vehicle Technology Program

Dave Howell, *Hybrid Electric Systems Team Lead*

National Renewable Energy Laboratory

Ahmad Pesaran, *Energy Storage Team Lead*