



# Connectivity-Enhanced Route Selection and Adaptive Control for the Chevrolet Volt

## Preprint

Jeffrey Gonder and Eric Wood  
*National Renewable Energy Laboratory*

Sai Rajagopalan  
*General Motors R&D*

*To be presented at the 21st World Congress on Intelligent Transport Systems  
Detroit, Michigan  
September 7–11, 2014*

**NREL is a national laboratory of the U.S. Department of Energy  
Office of Energy Efficiency & Renewable Energy  
Operated by the Alliance for Sustainable Energy, LLC**

This report is available at no cost from the National Renewable Energy Laboratory (NREL) at [www.nrel.gov/publications](http://www.nrel.gov/publications).

**Conference Paper**  
NREL/CP-5400-60960  
July 2014

Contract No. DE-AC36-08GO28308

## NOTICE

The submitted manuscript has been offered by an employee of the Alliance for Sustainable Energy, LLC (Alliance), a contractor of the US Government under Contract No. DE-AC36-08GO28308. Accordingly, the US Government and Alliance retain a nonexclusive royalty-free license to publish or reproduce the published form of this contribution, or allow others to do so, for US Government purposes.

This report was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or any agency thereof.

This report is available at no cost from the National Renewable Energy Laboratory (NREL) at [www.nrel.gov/publications](http://www.nrel.gov/publications).

Available electronically at <http://www.osti.gov/scitech>

Available for a processing fee to U.S. Department of Energy and its contractors, in paper, from:

U.S. Department of Energy  
Office of Scientific and Technical Information  
P.O. Box 62  
Oak Ridge, TN 37831-0062  
phone: 865.576.8401  
fax: 865.576.5728  
email: <mailto:reports@adonis.osti.gov>

Available for sale to the public, in paper, from:

U.S. Department of Commerce  
National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161  
phone: 800.553.6847  
fax: 703.605.6900  
email: [orders@ntis.fedworld.gov](mailto:orders@ntis.fedworld.gov)  
online ordering: <http://www.ntis.gov/help/ordermethods.aspx>

*Cover Photos: (left to right) photo by Pat Corkery, NREL 16416, photo from SunEdison, NREL 17423, photo by Pat Corkery, NREL 16560, photo by Dennis Schroeder, NREL 17613, photo by Dean Armstrong, NREL 17436, photo by Pat Corkery, NREL 17721.*

# CONNECTIVITY-ENHANCED ROUTE SELECTION AND ADAPTIVE CONTROL FOR THE CHEVROLET VOLT

**Jeffrey Gonder**  
**National Renewable Energy Laboratory**  
**15013 Denver West Parkway**  
**Golden, CO 80401-3305**  
**303-275-4462**  
[Jeff.Gonder@nrel.gov](mailto:Jeff.Gonder@nrel.gov)

**Eric Wood**  
**National Renewable Energy Laboratory**  
**15013 Denver West Parkway**  
**Golden, CO 80401-3305**  
**303-275-3290**  
[Eric.Wood@nrel.gov](mailto:Eric.Wood@nrel.gov)

**Sai Rajagopalan**  
**General Motors R&D**  
**30500 Mound Road**  
**Warren, MI 48090**  
**248-891-1737**  
[Sai.Rajagopalan@GM.com](mailto:Sai.Rajagopalan@GM.com)

## ABSTRACT

The National Renewable Energy Laboratory and General Motors evaluated connectivity-enabled efficiency enhancements for the Chevrolet Volt. A high-level model was developed to predict vehicle fuel and electricity consumption based on driving characteristics and vehicle state inputs. These techniques were leveraged to optimize energy efficiency via green routing and intelligent control mode scheduling, which were evaluated using prospective driving routes between tens of thousands of real-world origin/destination pairs. The overall energy savings potential of green routing and intelligent mode scheduling was estimated at 5% and 3%, respectively. These represent substantial opportunities considering that they only require software adjustments to implement.

## KEY WORDS

Intelligent Transportation Systems, Green Routing, Vehicle Drive Cycles/Profiles, Route-Based/Adaptive Powertrain Control, Vehicle Telematics/Navigation, Vehicle Energy Use Prediction

## INTRODUCTION

Energy security, fuel cost, and air quality concerns have led to increased powertrain electrification in new vehicles. At the same time, the ubiquitous availability of advanced vehicle telematics systems, such as OnStar, has made real-time information on driving routes, traffic,

and road topology readily accessible. Together, these trends offer the potential for increased powertrain efficiency, particularly in vehicles with both a traction battery and a combustion engine. Such vehicles can leverage route-specific information to anticipate road loads and schedule power flows in the most efficient manner possible.

Significant research exists in the literature exploring pathways for increasingly connected vehicles to optimize modern transportation systems. Some example applications include:

- **Routing algorithms** that leverage digital maps to make drive cycle predictions with the goals of minimizing travel time, energy use, and/or emissions [1-4]
- **Vehicle speed advisory programs** targeted at encouraging efficient driving habits such as gradual accelerations and intermediate travel speeds [5-8]
- **Predictive powertrain controls** that employ drive cycle predictions for optimal energy management in hybrid electric and plug-in hybrid electric vehicles [9-18]

As a contribution to this growing field of research, the National Renewable Energy Laboratory (NREL) and General Motors, in collaboration with the U.S. Department of Energy, evaluated connectivity-enhanced route selection and adaptive control techniques to even further increase energy efficiency in the Chevrolet Volt platform. The project included both simulation and chassis dynamometer testing to develop energy prediction algorithms applied to the Volt over multiple real-world driving profiles. The algorithms were used to implement and evaluate green routing and adaptive intelligent control mode scheduling for the Volt over predicted travel routes.

## APPROACH

Figure 1 illustrates the overall methodology for developing the energy predictions that serve as the basis for the green routing and adaptive control energy efficiency enhancements. The process begins by identifying candidate routes for traveling between a given (or predicted) origin and destination (O/D) pair. Each route is divided into segments characterized by road type information and that may also take real-time traffic and driver aggression predictions as inputs. A drive cycle model (developed as part of this project) then makes predictions of drive cycle characteristics expected over each driving segment. Based on these cycle metrics, as well as road grade and the current vehicle/battery state, a look-up table model (also developed for this project specific to the Volt powertrain) estimates the vehicle's segment-by-segment fuel and electricity consumption.

This methodology, and particularly the drive cycle and Volt powertrain (PT) models illustrated in Figure 1, was very computationally heavy to develop, involving processing, analyzing and simulating hundreds of thousands of drive cycles. However, the resultant look-up table models become quite computationally light to implement in a vehicle by eliminating the need for predicting a second-by-second speed trace or for real-time simulation using a computationally intensive vehicle model.

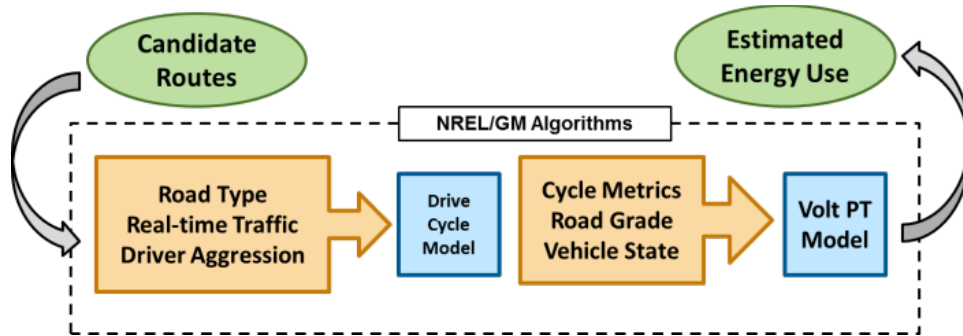


Figure 1: Overall energy use estimation methodology—providing the basis for green routing and adaptive control efficiency enhancements.

## RESULTS

### Cycle Metric Prediction

After establishing one or more potential driving routes between a given O/D pair (including map matching each segment of the route to an underlying road layer from a provider such as NAVTEQ/Nokia/HERE), the project team drew on information such as road segment type (functional class [FC], speed category, etc.) from the underlying road layer to predict representative cycle metrics (such as average speed, acceleration, road grade, and stops per mile) over each segment of the driving route. A data-driven correlation between road type and drive cycle characteristics was established by analyzing thousands of second-by-second real-world driving profiles collected with global positioning system devices and archived in NREL’s Transportation Secure Data Center (TSDC) (19). After map-matching the TSDC driving profiles to the underlying road layer (as described above), the driving profiles were subdivided into smaller increments, such as the 0.1-mile “nanotrips” illustrated in Figure 2.

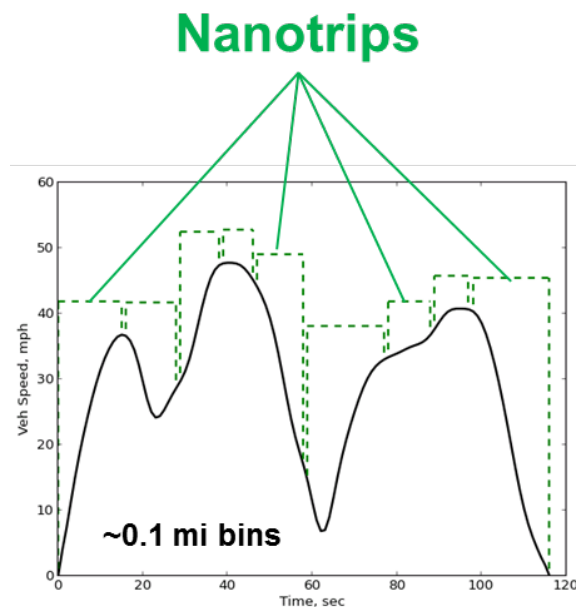


Figure 2: Illustrative division of real-world driving data into smaller “nanotrip” distance intervals.

The speed and acceleration characteristics for these nanotrips were then correlated to the road functional class being traversed (FC = 1 corresponds to high-throughput interstate travel, and FC = 5 corresponds to low-throughput neighborhood streets). As illustrated in Figure 3, this resulted in reasonable predictions of average speed and acceleration characteristics simply given information on the functional class of the current and the previous 0.1-mile segment of the given driving route. Further precision would be obtained by factoring in additional inputs, such as real-time traffic speeds over the given driving segment.

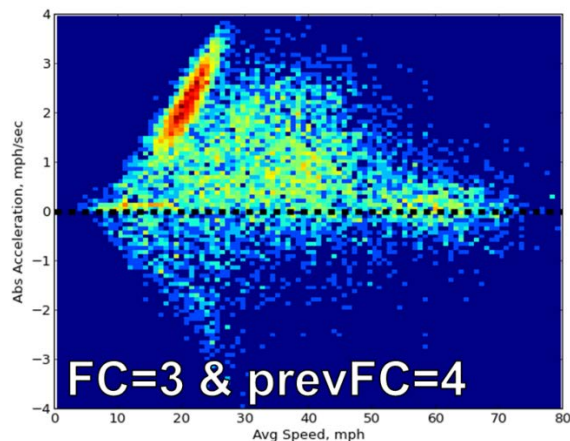


Figure 3: Significant concentration of nanotrip data around hard accelerations when transitioning from an FC4 to an FC3 road segment (i.e., to a higher speed/capacity roadway).

### **Energy Use Prediction**

In the next component of the project, estimated cycle metrics (such as average speed, acceleration, road grade, etc.) were converted into vehicle energy use predictions over a given route. The method developed to accomplish this involved generating detailed energy use maps for the vehicle using detailed simulations (complemented by physical vehicle data collection) over tens of thousands of drive cycles. As mentioned in the Approach section, these energy use maps are computationally heavy to develop, but once they are built they are computationally light to implement for a green routing or dynamic control application.

For the Chevrolet Volt powertrain used in this study, the energy use maps included both electricity and fuel consumption relationships, and considered charge depleting (CD) operation, charge sustaining (CS) operation, and the need to track vehicle state-of-charge (SOC) via the electricity consumption relationships to determine the correct operating mode. The effort relied primarily upon simulations using an internal General Motors powertrain model and secondarily on test data collected from a Chevrolet Volt that had been modified to allow on-the-fly initiation of CS operation even at a high vehicle battery SOC. Note that the results shown here omit proprietary data values specific to the Volt powertrain, but nonetheless convey the relative trends and overall steps employed in the analysis.

The simulation and test results were post-processed into nanotrips using the methods described in Figure 1. In addition to the previously mentioned cycle characteristic categorization (average speed, acceleration, etc.), the simulation and testing permitted associating each nanotrip with

values for electricity and fuel consumption (each value referenced as well to the battery SOC at the start of the nanotrip). Figure 4 illustrates a discretized look-up map of engine-off electric rate in the average speed and acceleration space. This map was derived from all the engine-off nanotrip simulation results, which showed consistent electric consumption rates for nanotrips with similar cycle characteristics.

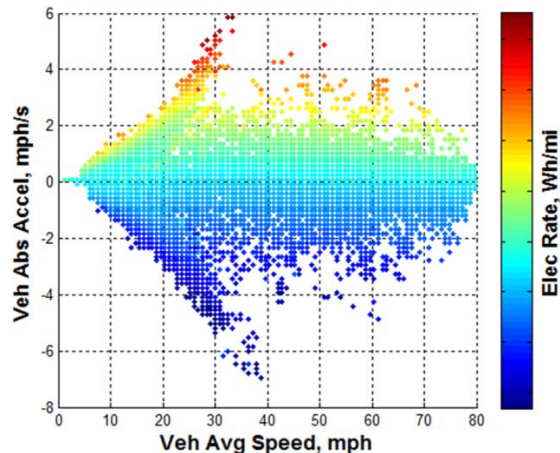


Figure 4: Discretized correlation between cycle characteristics and electric consumption rate generated from detailed simulation results when the Volt engine was off.

Figure 5 provides a similar visualization of the electric consumption rate while the vehicle engine is on, this time organized in a space defined by the SOC of the nanotrip (where the CS hold mode was engaged at a target SOC around the middle of the figure) and the product of the average speed and acceleration characteristics of the nanotrip. Consistent results within this space for nanotrips with similar characteristics again enable discretization of the data into a lookup map as illustrated by Figure 5. The engine-on fuel rate relationship was found to correlate well with the difference between the engine-on and engine-off electric rate estimates (as provided by the cycle-characteristic-based lookup maps in Figures 4 and 5). Figure 6 illustrates the resulting correlation established as compared to the actual results from the detailed simulation.

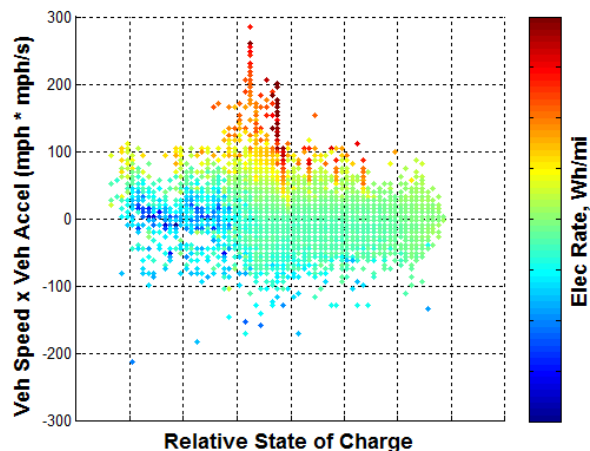


Figure 5: Discretized correlation between cycle characteristics, SOC, and electric consumption rate generated from detailed simulation results when the Volt engine was on.

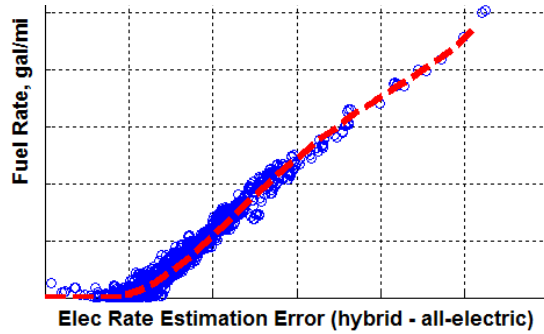


Figure 6: Engine-on fuel rate estimates correlate with the difference or “error” between the hybrid (engine-on) electric rate and the all-electric (engine-off) electric rate estimates.

The described look-up maps/correlations define everything needed to predict energy use (fuel and electricity consumption) from speed and acceleration cycle characteristics. The predictions can be further refined by establishing similar correlations for additional cycle segment characteristics such as road grade. Figure 7 illustrates the translation model (trained by the detailed simulation and test data over cycles run at different grades) to estimate electric rate impact as a function of road grade for similarly characterized nanotrips. As shown in Figure 8, the grade-based translation model shows a very good ability to predict the grade-adjusted electric consumption rates based only on the zero-grade electric rate as an input.

As a point of validation, the energy prediction maps (trained on simulation data) were evaluated against test data from an instrumented Chevrolet Volt run on a vehicle dynamometer over a comprehensive range of driving conditions including combinations of speed/acceleration characteristics, positive and negative road grades, control modes (CD/CS), and battery SOCs. Figure 9 provides a snapshot of these comparisons by showing distributions of model error (energy prediction map less measured test data) for both electric and fuel use rates. Model error distributions can be seen to center around zero (represented by the red dashed lines).

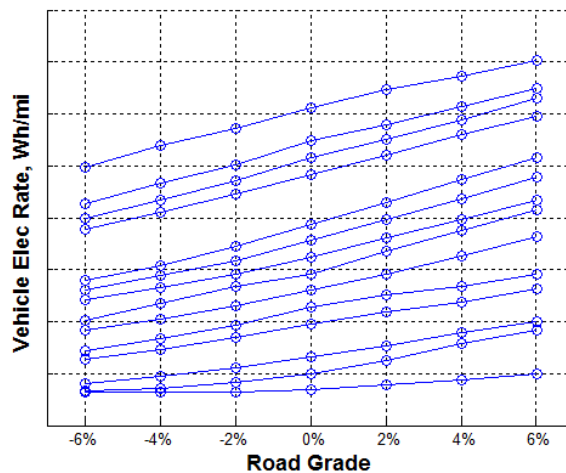


Figure 7: Grade-based electric rate translation model created to adjust the zero-grade lookup maps described in Figures 4–6 to account for driving segment grade.



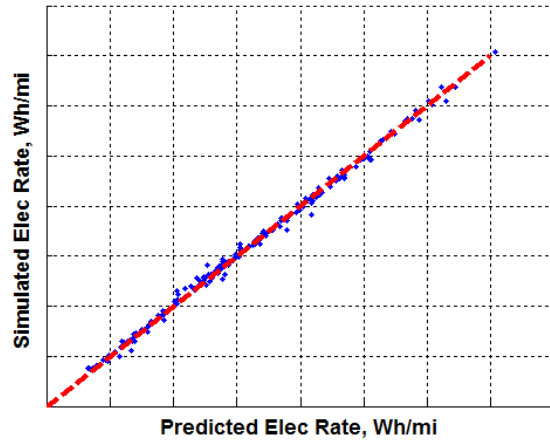


Figure 8: The grade translation model agrees well with individual electric rate adjustments observed from simulation and test data over similarly characterized nanotrips at different road grades.

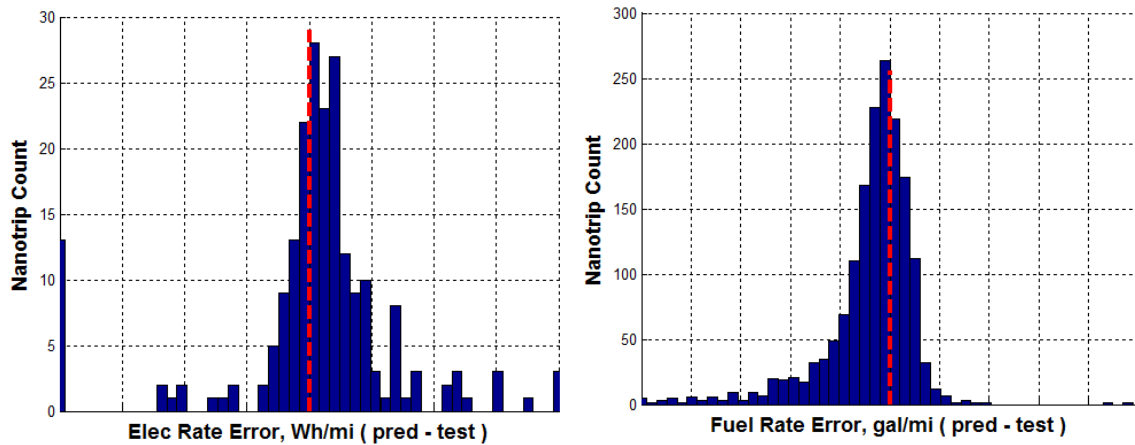


Figure 9: Distributions of modeled electric and fuel rate errors when comparing energy estimation maps to dynamometer test data (red dashed line represented zero error).

### Green Routing

Evaluation of the connectivity-enabled green routing and route-based control enhancements again involved leveraging the TSDC—specifically the large set of real O/D locations contained in the database. NREL leveraged Google Maps’ application programming interface to generate route options between each O/D pair and applied the cycle metric and fuel/electricity prediction approach outlined above to evaluate each route. Figure 10 categorizes the results for the nearly 43,000 O/D pairs and highlights that for many O/D pairs Google’s routing software either recommends only one route, or the fastest recommended route also turns out to be the most energy efficient route. However, 37% of the time the fastest route does not correspond with the greenest route, so that fraction of driving trips is taken to be the potential opportunity where green routing could result in energy-saving benefits (relative to the fastest route being the assumed default).

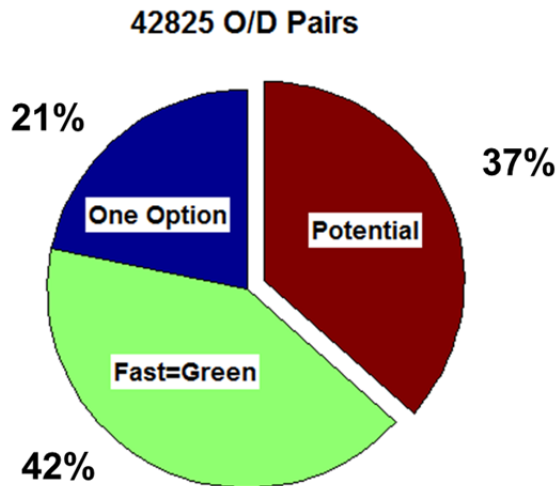


Figure 10: 37% of the nearly 43,000 O/D pairs show green routing energy savings potential relative to the fastest route option.

Under this set of assumptions, any green routing energy savings will come at a cost of increased travel time. Figure 11 explores this tradeoff by arranging the results as a function of the vehicle operator’s hypothetical monetary value of time spent in the vehicle. The top line in the plot corresponds to percent increased travel time, and the bottom line corresponds to percent energy and cost reductions provided by the “greenest” route.

To facilitate interpretation, consider two example vertical slices on this plot. The points intersected by the y-axis represent the extreme scenario with no value of time penalty counted against increased time requirements by the green route. The aggregate results represented by this scenario could realize a 12.3% reduction in energy use and cost, but a 14.4% increase in travel time. As a second example, consider the vertical slice at a time value of \$35/hr. For this scenario, energy use and cost could be decreased by 1.0% with a negligible increase in travel time.

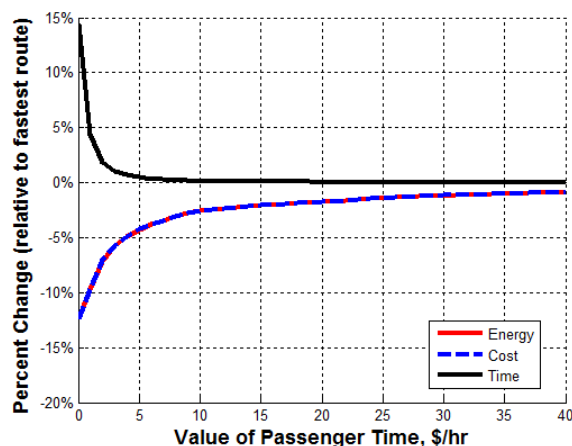


Figure 11: Trade-off between energy/cost savings and travel time increases as a function of passenger/driver value of time (for the 37% of O/D pairs where the least energy-consuming route prediction was not the fastest route).

## Control Mode Scheduling

The intelligent CD vs. CS mode scheduling evaluation involved similar large-scale analysis, specifically, of over 100,000 potential routes identified from the TSDC O/D database. The evaluation required first adding an extra analysis layer to compare the default mode schedule (CD followed by CS) as compared to the optimal (least fuel consuming) mode schedule. As a simplified overview, the methodology included in the added layer begins by assuming that all driving could be accomplished in CD mode (initially ignoring energy limits of the vehicle battery). It then incrementally substitutes driving segments from CD to CS operation, until the final trip SOC equals that from the default CD followed by CS operation. Trip segments are prioritized for substituting from CD to CS control based on minimizing the cost/benefit ratio of doing so, where the cost is defined as the increase fuel use incurred by the substitution and the benefit is defined as the decreased electric depletion rate.

The top plot in Figure 12 shows an example nominal vs. optimal battery SOC depletion profile generated from the methodology described above. Note that for evaluating this project's high-level CD vs. CS mode scheduling opportunity, each considered trip was assumed to begin at an initial SOC such that 50% or more of the trip was completed in CS mode. The bottom plot in Figure 11 shows the corresponding fuel consumption profile for the nominal vs. optimal control mode scheduling over the example profile. In this example, fuel consumption was reduced 25% by scheduling CS operation during highway driving segments in the first half of the route, and saving CD operation for the city driving anticipated at the end of the route.

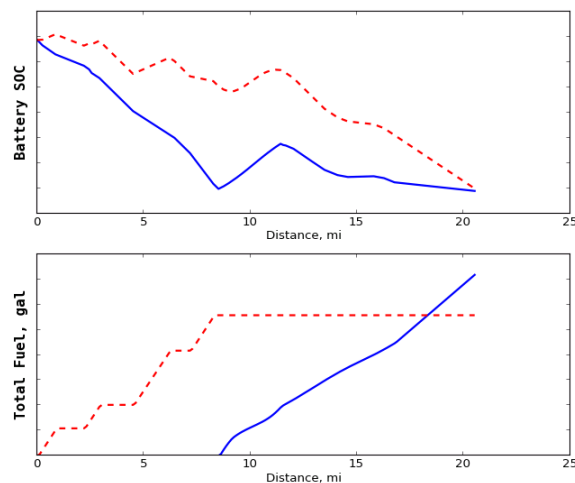


Figure 12: Nominal (solid blue line) vs. optimal (dashed red line) battery SOC and fuel use profiles for one example route.

Figure 13 shows the scatter of fuel savings opportunity from optimal mode scheduling applied to over 100,000 trips. These results indicated that very large fuel savings results predominantly occur at short driving distances, which may be an artifact of the reduced starting SOC approach applied for these shorter trips. However, a number of trips (even longer than 30–40 miles in length) realize fuel savings on the order of 10%, and the average fuel savings across all trips exceeds 3%.

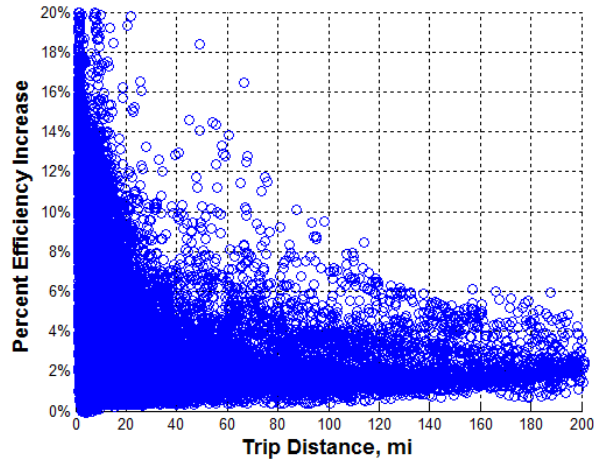


Figure 13: Efficiency improvements from control mode scheduling optimization evaluated across over 100,000 representative driving routes.

## CONCLUSIONS

Under this project, NREL collaborated with General Motors to evaluate connectivity-enabled efficiency enhancements for the Chevrolet Volt. Project accomplishments included developing and demonstrating the ability to estimate drive cycle characteristics over anticipated driving routes. The project team further developed a high-level model to predict vehicle fuel and electricity consumption based on driving characteristic and vehicle state inputs. The team combined and leveraged these techniques in pursuit of energy efficiency optimization via green routing and intelligent control mode scheduling.

The green routing and intelligent control mode scheduling enhancements were evaluated using prospective driving routes between tens of thousands of real-world O/D pairs. Considering the aggregate green routing benefit multiplied by the fraction of O/D pairs where the default (fastest) route consumed more fuel, the overall green routing fuel savings opportunity could approach 5% (assuming a low value of passenger time). The average efficiency benefit from intelligent high-level scheduling of CS vs. CD control showed a similar magnitude—a little over 3% potential fuel savings on trips that require some mix of CS and CD operation. An 8% fuel savings (when taken as additive benefits) represents a substantial opportunity especially considering that only software adjustments are required to realize this efficiency gain.

Future work efforts could include adding route-based optimization to lower-level controls (in addition to the high-level CD vs. CS control mode scheduling), formally incorporating real-time traffic/congestion information to further improve cycle metric predictions, and evaluating result sensitivity to various conditions and erroneous predictions. Additional options could include implementing, refining and more robustly testing both green routing and adaptive control approaches in a development vehicle, and/or considering additional vehicle platforms/powertrains.

## ACKNOWLEDGEMENTS

This study was jointly supported by the U.S. Department of Energy's Vehicle Technologies Office and General Motors. The authors would specifically like to thank David Anderson of the U.S. Department of Energy and Chen Fang Chang of General Motors for their guidance and support.

## REFERENCES

- (1) Lioudakis, G.V., C.A. Papagianni, D.I. Kaklamani, I.S. Venieris, and A.H. Salden. 2010. "An Intelligent Traffic Management System for the Eco-Optimization of Urban Traffic Flows." In *2010 IEEE International Conference on Communications Workshops (ICC)*, 1-5.  
[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=5503897](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5503897)
- (2) Minett, C.F., A.M. Salomons, W. Daamen, B. Van Arem, and S. Kuijpers. 2011. "Eco-routing: Comparing the Fuel Consumption of Different Routes Between an Origin and Destination Using Field Test Speed Profiles and Synthetic Speed Profiles." In *2011 IEEE Forum on Integrated and Sustainable Transportation System (FISTS)*, 32–39. [http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=5973621](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5973621)
- (3) Gajanand, M.S., and T.T. Narendran. 2013. "Green Route Planning to Reduce the Environmental Impact of Distribution." *International Journal of Logistics Research and Applications* 16 (5).  
<http://www.tandfonline.com/doi/abs/10.1080/13675567.2013.831400#.U5ipsvldX3Q>
- (4) Guo, L., S. Huang, and A.W. Sadek. 2013. "An Evaluation of Environmental Benefits of Time-Dependent Green Routing in the Greater Buffalo-Niagara Region." *Journal of Intelligent Transportation Systems: Special Issue on Intelligent Transportation Systems Applications for the Environment and Energy Conservation (Part 1)* 17 (1).  
[http://www.tandfonline.com/doi/abs/10.1080/15472450.2012.704336#.U5i1C\\_lDX3Q](http://www.tandfonline.com/doi/abs/10.1080/15472450.2012.704336#.U5i1C_lDX3Q)
- (5) Vreeswijk, J.D., M.K.M. Mahmud, and B. van Arem. 2010. "Energy Efficient Traffic Management and Control - the eCoMove Approach and Expected Benefits." In *2010 13th International IEEE Conference on Intelligent Transportation Systems (ITSC)*, 955–961.  
[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=5625122&tag=1](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5625122&tag=1)
- (6) Carslaw, D.C., P.S. Goodman, F.C.H. Lai, and O.M.J. Carsten. 2010. "Comprehensive Analysis of the Carbon Impacts of Vehicle Intelligent Speed Control." *Atmospheric Environment* 44 (23) (July): 2674–2680.  
<http://www.sciencedirect.com/science/article/pii/S1352231010003535>
- (7) Nienhüser, D., T. Bär, R. Kohlhaas, T. Schamm, J. Zimmermann, T. Gumpff, M. Strand, O. Bringmann, and J.M. Zöllner. 2012. "Energy Efficient Driving and Operation Strategies Based on Situation Awareness and Reasoning." *IT - Information Technology* 54 (1): 5–16.  
[http://www.researchgate.net/publication/235482644\\_Energy\\_Efficient\\_Driving\\_and\\_Operation\\_Strategies\\_Based\\_on\\_Situation\\_Awareness\\_and\\_Reasoning](http://www.researchgate.net/publication/235482644_Energy_Efficient_Driving_and_Operation_Strategies_Based_on_Situation_Awareness_and_Reasoning)
- (8) Gonder, J., M. Earleywine, and W. Sparks. 2012. "Analyzing Vehicle Fuel Saving Opportunities through Intelligent Driver Feedback." *SAE International Journal of Passenger Cars – Electronic and Electrical Systems*. NREL/CP-5400-53864. Golden, CO: National Renewable Energy Laboratory, April 16, 2012; 13 pp. Accessed April 21, 2014: <http://www.nrel.gov/docs/fy12osti/53864.pdf>

- (9) O’Keefe, M.P., and Markel T. 2006. “Dynamic Programming Applied to Investigate Energy Management Strategies for a Plug-in HEV” Presented at the 22<sup>nd</sup> *International Battery, Hybrid and Fuel Cell Electric Vehicle Symposium and Exhibition (EVS22)* Yokohama, Japan. <http://www.nrel.gov/docs/fy07osti/40376.pdf>
- (10) Gong, Q., Y. Li, and Z.-R. Peng. 2007. “Optimal Power Management of Plug-in HEV with Intelligent Transportation System.” In *2007 IEEE/ASME International Conference on Advanced Intelligent Mechatronics*, 1–6.  
[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=4412579](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=4412579)
- (11) Gong, Q., Y. Li, and Z.-R. Peng. 2007. “Trip Based Power Management of Plug-in Hybrid Electric Vehicle with Two-Scale Dynamic Programming.” In *IEEE Vehicle Power and Propulsion Conference, 2007. VPPC 2007*, 12–19.  
[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=4544089](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=4544089)
- (12) Gong, Q., Y. Li, and Z.-R. Peng. 2008. “Computationally Efficient Optimal Power Management for Plug-in Hybrid Electric Vehicles Based on Spatial-domain Two-scale Dynamic Programming.” In *IEEE International Conference on Vehicular Electronics and Safety, 2008. ICVES 2008*, 90–95.  
[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=4640882](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=4640882)
- (13) Gong, Q., Y. Li, and Z.-R. Peng. 2009. “Power Management of Plug-in Hybrid Electric Vehicles Using Neural Network Based Trip Modeling.” In *American Control Conference, 2009. ACC ’09*, 4601–4606.  
[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=5160623](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5160623)
- (14) Katsargyri, G.-E., I.V. Kolmanovsky, J. Michelini, M.L. Kuang, A.M. Phillips, M. Rinehart, and M.A. Dahleh. 2009. “Optimally Controlling Hybrid Electric Vehicles Using Path Forecasting.” In *American Control Conference, 2009. ACC ’09*, 4613–4617. <http://dspace.mit.edu/handle/1721.1/59409>
- (15) Katsargyri, G.-E., I. Kolmanovsky, J. Michelini, M. Kuang, A. Phillips, M. Rinehart, and M. Dahleh. 2009. “Path Dependent Receding Horizon Control Policies for Hybrid Electric Vehicles.” In *2009 IEEE Control Applications, (CCA) Intelligent Control (ISIC)*, 607–612.  
[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=5280977](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5280977)
- (16) Zhang, C., and A. Vahid, 2010. “Real-time Optimal Control of Plug-in Hybrid Vehicles with Trip Preview.” In *American Control Conference (ACC), 2010*, 6917–6922. <http://ieeexplore.ieee.org/stamp/stamp.jsp?arnumber=05531308>
- (17) Kermani, S., S. Delprat, T.M. Guerra, R. Trigui, and B. Jeanneret. 2012. “Predictive Energy Management for Hybrid Vehicle.” *Control Engineering Practice* 20 (4) (April): 408–420.  
<http://www.sciencedirect.com/science/article/pii/S0967066111002498>
- (18) Karbowski, D., and S. Pagerit. 2012. “Optimal Energy Management of a PHEV Using Trip Information” 2012 Department of Energy Hydrogen Program and Vehicle Technologies Annual Merit Review.  
[http://energy.gov/sites/prod/files/2014/03/f10/vss068\\_karbowski\\_2012\\_o.pdf](http://energy.gov/sites/prod/files/2014/03/f10/vss068_karbowski_2012_o.pdf)
- (19) “Secure Transportation Data Project.” 2013. National Renewable Energy Laboratory. [www.nrel.gov/tsdc](http://www.nrel.gov/tsdc)